



Protection class: IP30  
 EN 60950-1, EN 301489-3, EN 300220-2  
 ISO/IEC 14535-3-10

**Product Image**



**Dimensions**

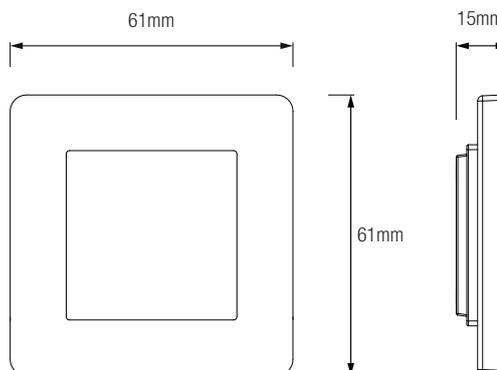

**Description**

Four way wireless and batteryless switch for use with DALI control systems in conjunction with the 97-434 DALI-EnOcean gateway. White plastic housing supplied with self adhesive pads for surface mounting. Programmable functions.


**Programmable Functions**

- On / Off
- Raise / Lower
- Scene Recall

**Convenience**

- Wireless Control
- Batteryless Energy Harvesting Technology
- Self Adhesive Mounting

**Schematic**

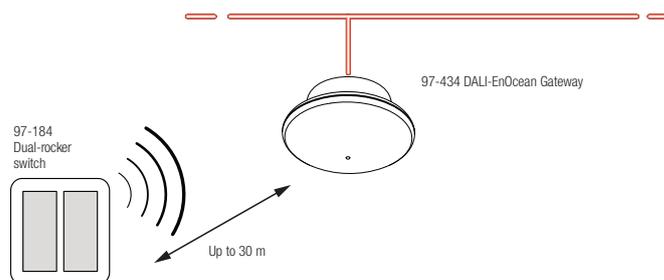

**Compatible Systems**

Class Control	Yes*
Control 2	Yes*
Control 2+	Yes*
Control 3	Yes*

**Basic Technical Data**

Power Source	Self Generating
DALI Current Draw	15mA
Weight	150g
Interface	DALI* Single address per switch
Max Switches	20 Per 494 Gateway

\* For use with 97-434 DALI-EnOcean gateway which must be connected to the DALI control line and within 30m of the switch.