




ST Track.

- Versatility add linear track products or spotlights
- three circuits
- affordable
- available in 1m / 2m / 3m easily cut to length
- available in white, silver or black
- surface, suspended or recessed












- Cost efficiency and flexibility with a myriad of light options together with lighting Controls, emergency lighting systems, sensor modules and adaptors for pendant luminaires.
- General lighting and UGR<19 options for workplaces
- 5 / 7 / 13 / 14 core (power lines)
- Available in three lengths: 1.5m, 3.0m and 4.5m
- Available in white, silver or black
- LED light modules clip in without tools at any position along the trunking length.
- Freely re-position the lights at any time in the future without the need for electrical work.
- Fast installation with quick fix RIDI DUO Connect connectors.

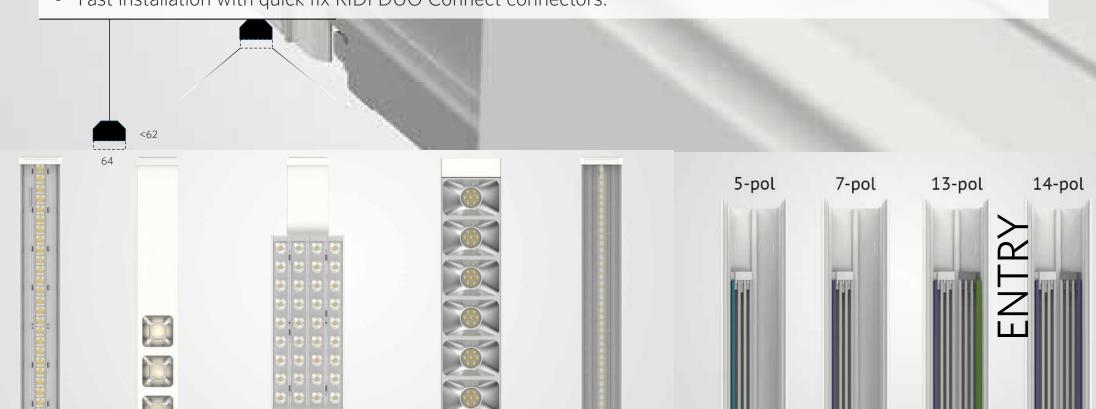

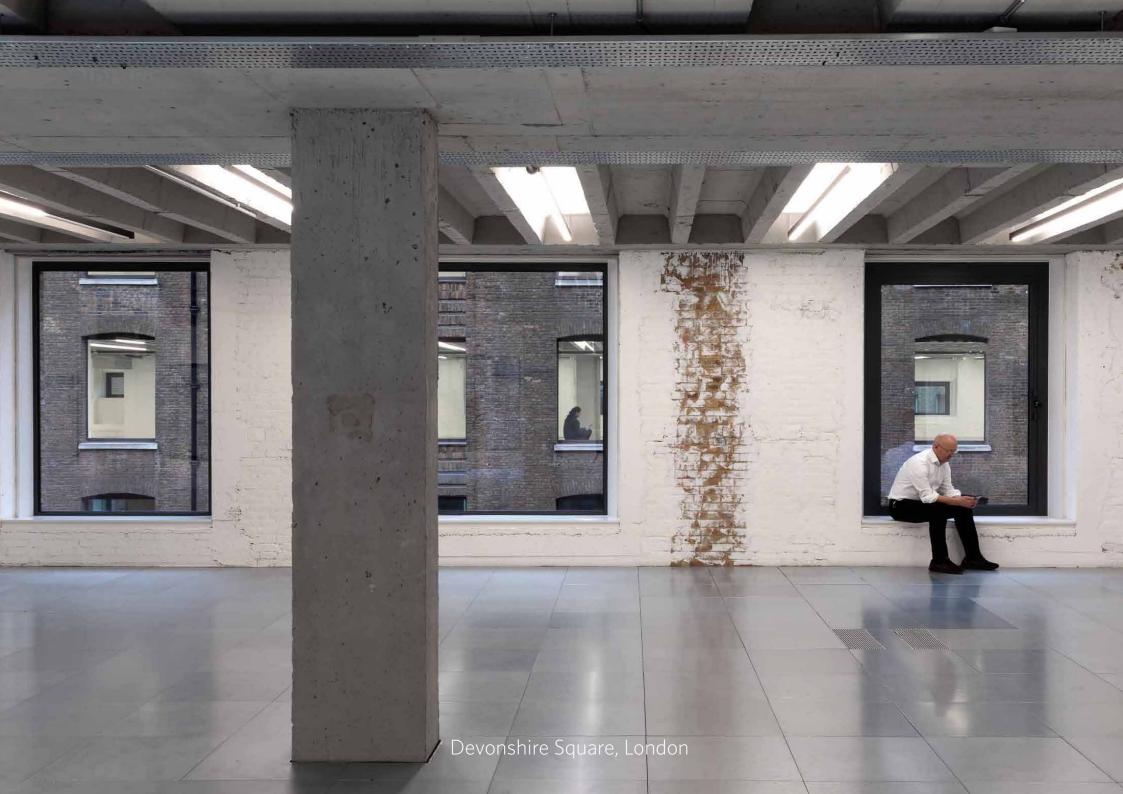


- Diminuitive size just 40mm wide
- Optimal task lighting with direct or direct/indirect distribution
- Available in standard and custom lengths
- 3000K or 4000K
- RIDI Soft Light Opal diffuser option or micro lens technology for UGR<19 options for comfort in the workplace
- Available as standard in three RAL colours 9016
 WHITE/9005 BLACK/7016 ANTHRACITE
- Up to 123 lm/W
- Sensor integration available

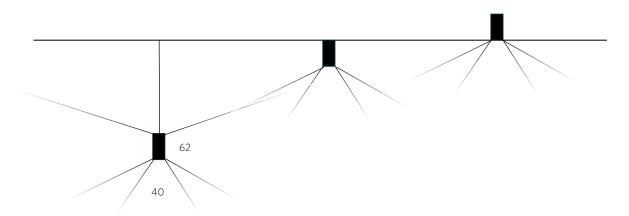



- Great flexibility and modularity in all applications
 create your design
- Direct or direct/indirect available
- 50mm wide profile available in standard and custom lengths and structures
- 3000K or 4000K
- RIDI Soft Light Opal diffuser option or micro lens technology for UGR<19 options for comfort in the workplace
- Available as standard in three colours RAL colours 9016 WHITE/9005 BLACK/7016 ANTHRACITE


• Up to 115 lm/W

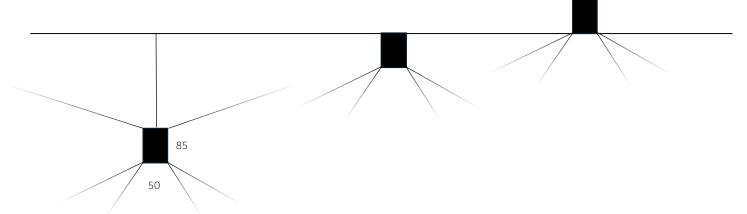




iline 5+3.

- Regressed 30mm wide optic in a 50mm profile
- Designed to exceed BS EN 12464-1 office guidelines
- DARK LIGHT optic sets a more natureal mood UGR as low as 15* using RIDI OEC (Optimal Eye Comfort) technology
- Exceptional efficiency <146 lm/W
- Direct or direct/indirect available
- Available in standard and custom lengths
- 3000K or 4000K or Tunable white
- Available as standard in three colours RAL colours 9016 WHITE/9005 BLACK/7016 ANTHRACITE
- Integrated Emergency Min 900mm
- Sensor integration available

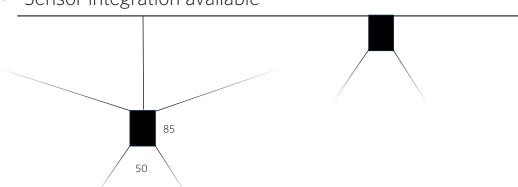

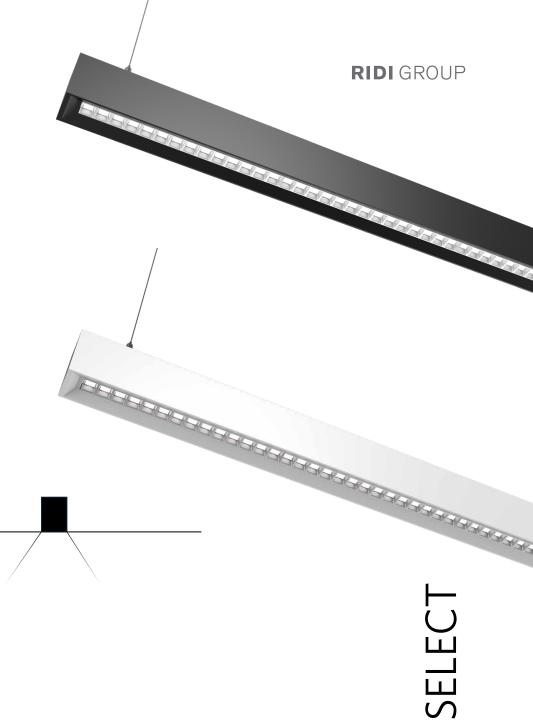


^{*}compliance can only be proven once the ergonomic metrics of how the luminaires relate to occupancy in a real space have been established.




iline 6

- High level of light output
- Direct or direct/indirect available
- 60mm wide profile available in standard and custom lengths
- 3000K or 4000K
- RIDI Soft Light Opal diffuser option or micro lens technology for UGR<19 options for comfort in the workplace
- Available as standard in three coloursI RAL colours 9016 WHITE/9005 BLACK/7016 ANTHRACITE
- Exceptional efficiency up to 134 lm/W
- Integrated Emergency- Min 900mm
- Sensor integration available

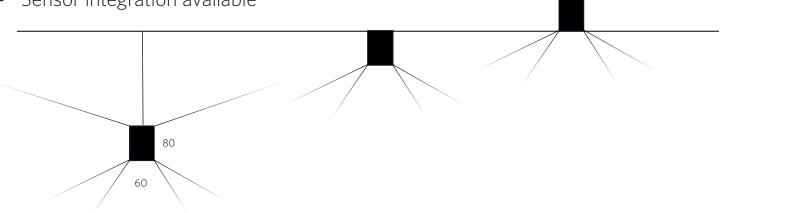




SELECT

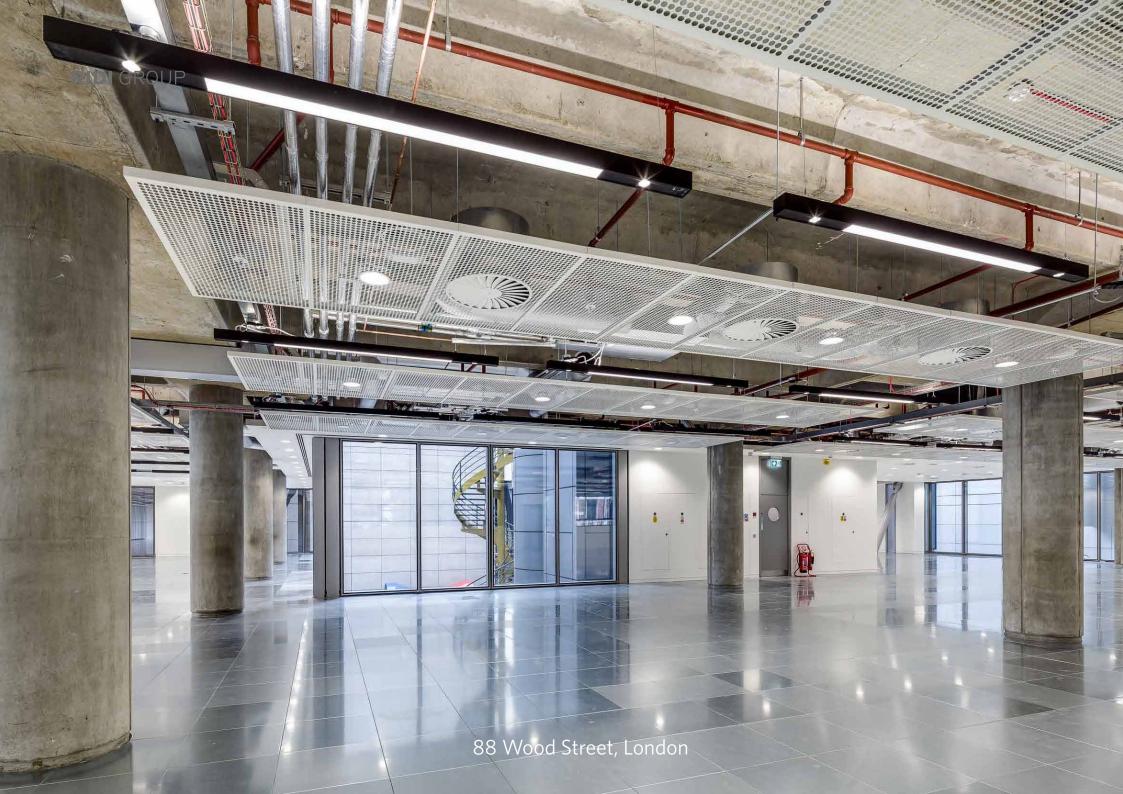

H80.

- The do anything line of light luminaire infinite opportunities available - personalised solutions for modern or heritage projects
- Stylish yet functional
- Incredibly robust construction for very long service life
- Can create rings up to 12 metres diameter
- Textured structured finish eliminates finger prints
- Integral emergency options
- Many standard light insert options that are replaceable;



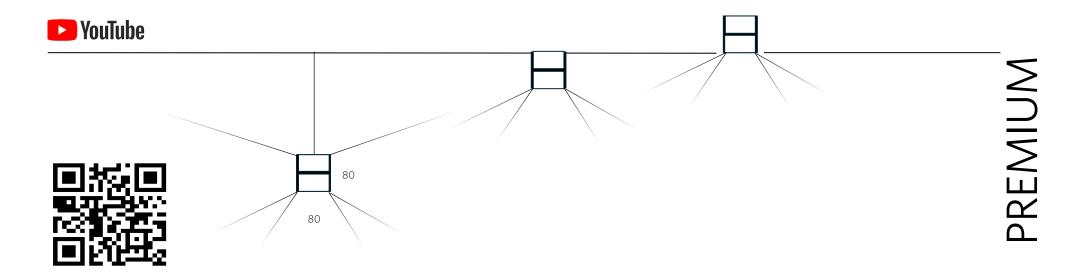




PURELIGHT Office.

- Soft diffuse light yet capable of meeting UGR<19
- Designed to meet the demands of BS EN 12464-1
- Adaptable lighting Integrated batwing indirect light with integrated control (wired of wireless)
- WELL compliance with white light colour options
 Circadian light option 2700K to 6500K Tunable White
- Integral emergency on 1.5m+ versions
- Authentic colour rendition with CRI 90+ option
- Luminaire efficiency of up to 144 lm/W (with CRI 80)
- Long service life over 100,000 hours (L80B50) life












PREMIUM

- PRO has class leading efficiency up to 145 Lumens per watt
- RIDI Soft sky indirect light for broad even light distribution
- PRO allows for versatile personalised solutions to meet ever demanding well being and efficiency standards
- 65mm wide profile available in standard and custom lengths
- Create well balanced spaces with latest human centric principles -3000K, 3500K, 4000K, 2700-6500K
- Comfortable Opal or precise microprismatic optics available
- PRO adds standard Ra 85 and 90+ for optimal colour authenticity
- Integrated Emergency Min 900mm
- Sensor integration available

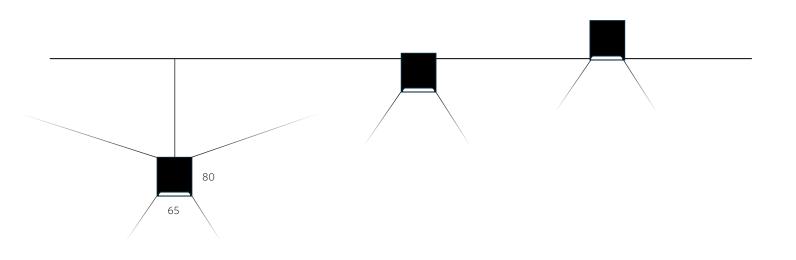

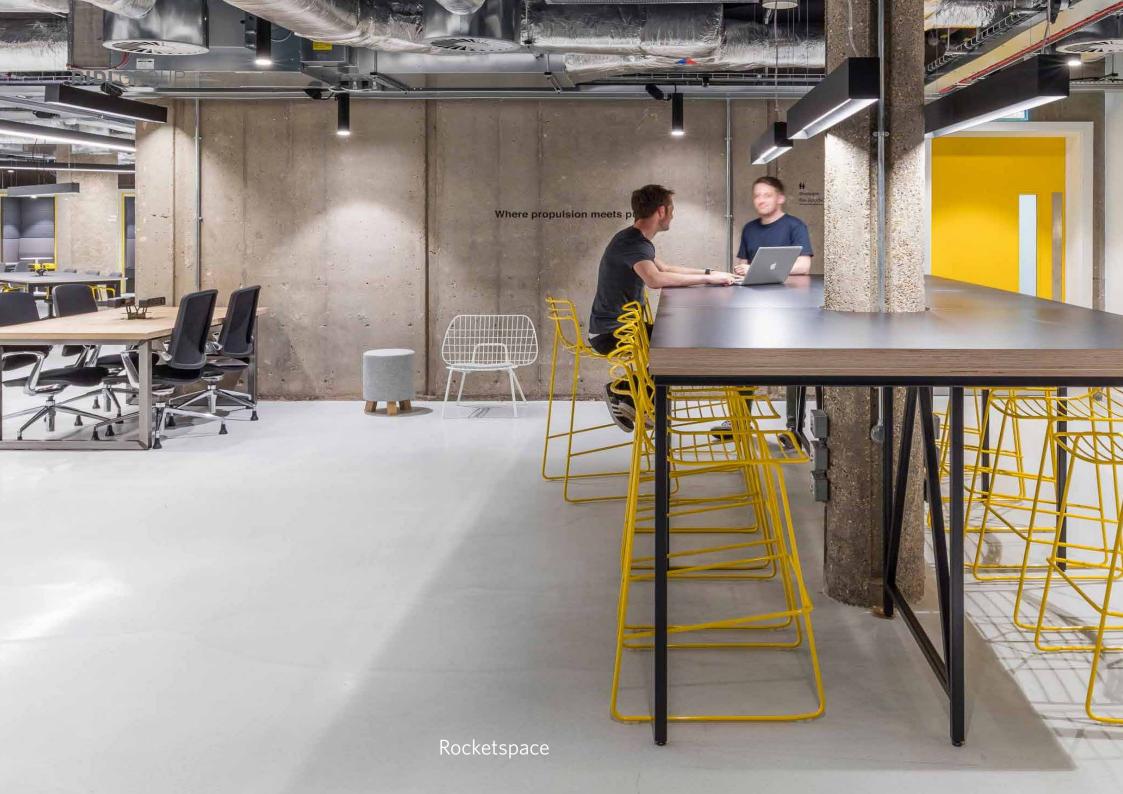

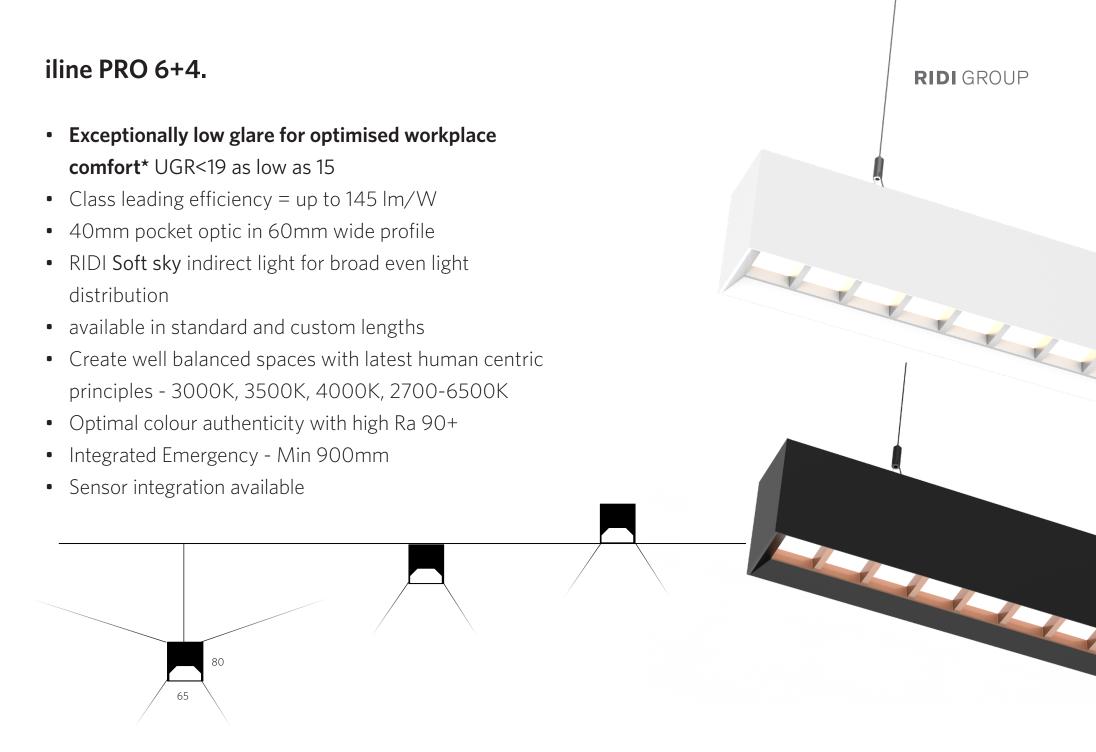

^{*}compliance can only be proven once the ergonomic metrics of how the luminaires relate to occupancy in a real space have been established.



SunEditori

TelechyGroup Worlehouse

TelecityGroup

Deres

ROFF Umited White Collar Factory M SPM

SAGE


SAGE


Aomingato

Monregetor TelecifyGroup recepho

> ADERWENT LONDON BUILDING



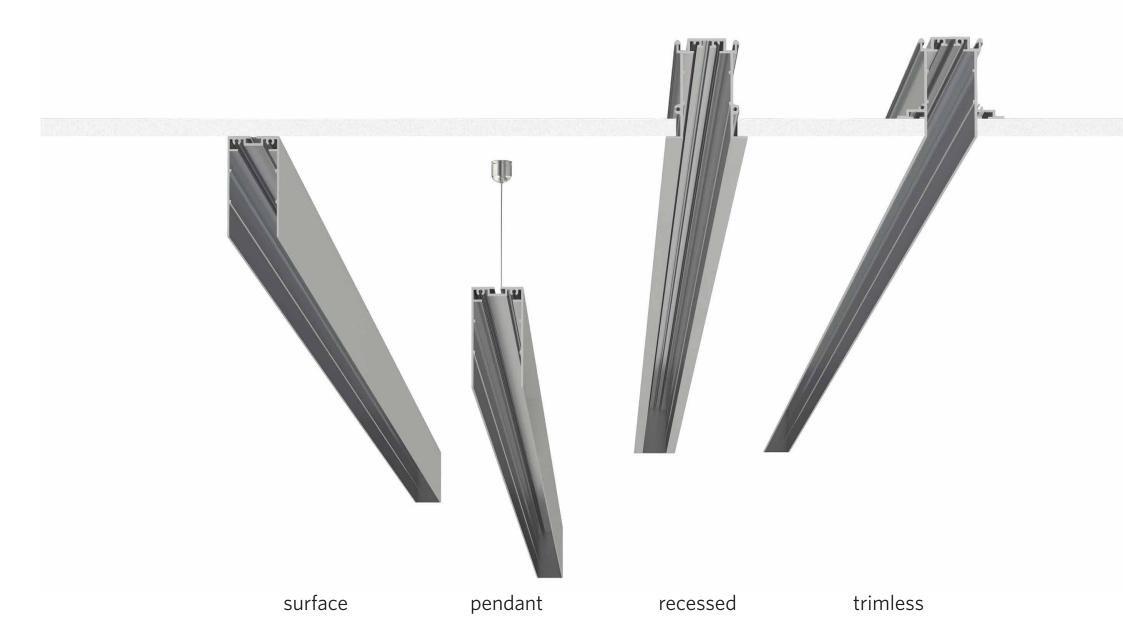

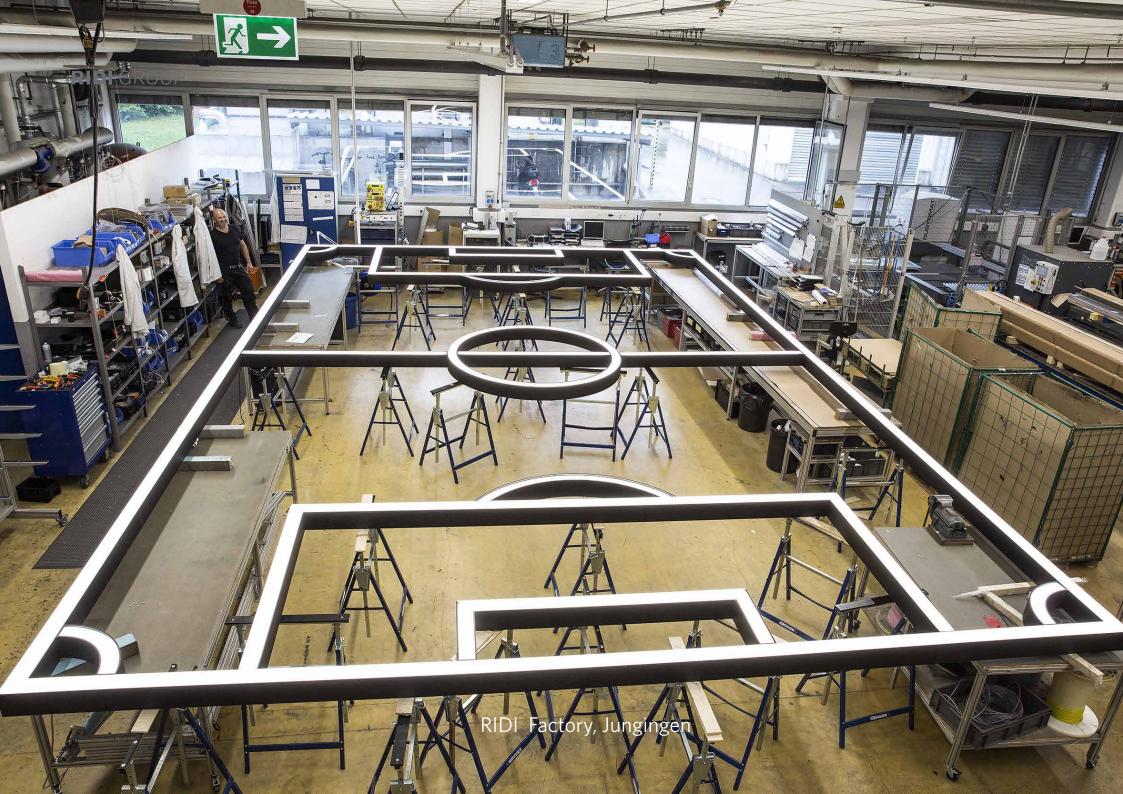

- All SELECT and PREMIUM product lines can be specified in individual lengths
- In addition their flexible design allows be spoke structures or shapes to be specified.





- The new headquarters of Copper, the leading digital asset technology company, is located within an iconic 1990s Richard Rogers building in the heart of London
- iLine 6 used as the basis for precise cross design and a key signature feature
- Fitting delivered with iLine 6 mounted pre installed onto expanded mesh metal ceiling panels
- Pre wired with LCM plug and socket system significantly reducing installation time

RIDI GROUP 25 Berkeley Square, London

- iLine 4 /5 /6 and H80 systems can be configured to suit the design or features of any space, straight or curved
- Minimum bending radius is 500mm



DIDI ODOUD	ENTRY	ENTRY	SELECT	SELECT	SELECT	SELECT	DDENAILINA	PREMIUM	DDEAHLIAA	DDENAILINA
RIDI GROUP	ENIKI		SELECT	SELECT	SELECT	SELECT	PKEMIOM	PREMION	PKEINIIOINI	PREMION
	ST Track	LINIA Evo	iline 4	iline 5	iline 5+3	iline 6	H80	PURELIGHT	iLine PRO 6	iLine PRO6+4
Profile Width	32mm	64mm	40mm	49mm	49mm	60mm	80mm	90mm	65mm	65mm
Profile depth	38mm	62mm	62mm	85mm	85mm	80mm	80mm	90mm	90mm	90mm
Custom Lengths & Structures	1m / 2m / 3m	1.5m / 3.0m / 4.5m	✓	✓	✓	✓	✓	✓	✓	✓
RAL colours 9016 WHT/9005 BLK/7016 GRY	WHT/SILVER/BLK	WHT/BLK	✓	✓	✓	✓	✓	√	✓	√
Pendant	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Surface	✓	✓	✓	\checkmark	✓	√	\checkmark	✓	\checkmark	√
Recessed	✓	X	✓	\checkmark	✓	√	\checkmark	X	Χ	X
Opal optic	Χ	✓	✓	\checkmark	✓	√	\checkmark	✓	\checkmark	√
MPO optic	X	✓	✓	✓	✓	✓	✓	✓	✓	✓
Cell optic	X	✓	✓	✓	✓	✓	✓	X	\checkmark	√
Direct	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Direct/Indirect	X	X	✓	✓	✓	✓	✓	✓	✓	✓
Independent Indirect Option available	X	X	✓	✓	✓	✓	✓	✓	✓	✓
Output /m (Direct)	X	✓	2172lm	1302lm	1302lm	2053lm	✓	✓	2046lm	2675lm
Output /m (Direct/Indirect)	X	X	2818lm	2806lm	2806lm	3114lm	✓	✓	4310lm	4939lm
Custom Outputs	X	X	✓	✓	✓	✓	\checkmark	✓	\checkmark	\checkmark
Lm/W (up to)	X	202	123	115	146	134	141	145	145	162
Macadams	3	3	3	3	3	3	3	3	2/3	2/3
Colour Temp 3000K	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	\checkmark
Colour Temp 3500K	X	X	Χ	Χ	Χ	Χ	✓	✓	\checkmark	✓
Colour Temp 4000K	X	✓	✓	✓	✓	Χ	\checkmark	✓	\checkmark	\checkmark
Tuneable white Circadian	X	X	Χ	X	✓	✓	✓	✓	\checkmark	✓
Ra 85	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	\checkmark
Ra 90	X	✓	Χ	X	X	Χ	\checkmark	✓	✓	\checkmark
UGR <19	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	\checkmark
UGR<22	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	✓
Dali Dimming	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	\checkmark
Apcon BLE (Casambi)	X	✓	✓	✓	✓	✓	\checkmark	✓	\checkmark	✓
Integrated Emergency (Min 900mm) std & Dali	X	✓	✓	✓	✓	✓	\checkmark	✓	✓	✓
Sensor integration	Χ	✓	✓	✓	✓	✓	\checkmark	✓	✓	✓
L80B10	Χ	✓	✓	✓	✓	✓	✓	L90	✓	✓
Warranty	X	✓	5	5	5	5	5	5	5	5
Parts availability	10+	10+	10+	10+	10+	10+	10+	10+	10+	10+
Life	NA	<100'000	<100'000	<100'000	<100'000	<100'000	<100'000	<100'000	<100'000	<100'000

Line of light solutions made easy.

- Whether its budget, finish, light control or size there is a lines of light solution available from RIDI.
- We can tailor solutions to the needs of the task and/or the scale of the space.

