

Rendered image for example, not final product photo

**Pixl 6 DAWS 840 H0 1200**  
Perforated plasterboard panel with four integrated multipoint LED downlights.  
Removable and replaceable LED boards mounted within the panel providing diffuse light.


Fire retardent acoustic suppression material in the rear of the panel reduces room reverberation times. Perforated panel allows sound to be absorbed from the front and rear of the fitting.

DALI Dimmable.

Supplied with 1.5m wire suspension and pre-wired 5 core transparent flex.

Safety class I Safety class IP20

Luminaire Luminous Flux [Lumens]	Luminaire Power [Watts]	Efficacy [Lumens/Watt]	Correlated Colour Temperature [Kelvin]
11,040	112	98	4000

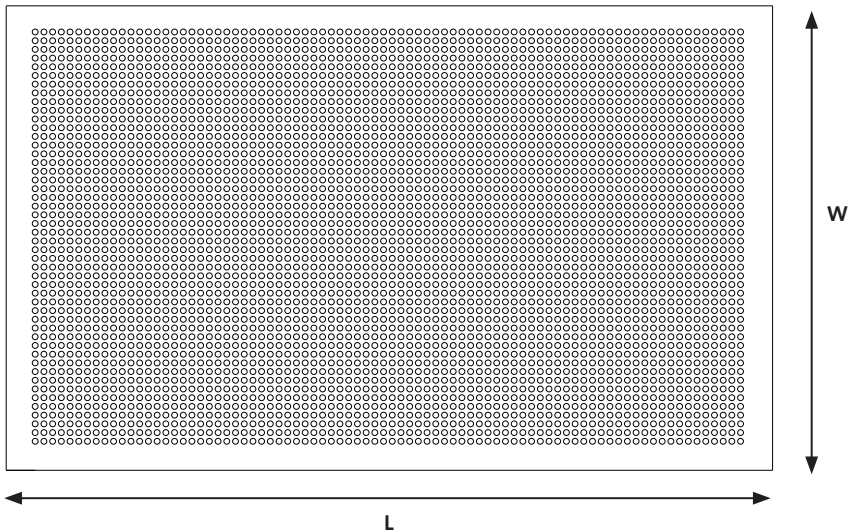

Dimens.[mm]		
L	W	H
1980	1200	75