

RG ADDITIONS

ICEL

LED SELV

3h

IP42

LED

CE

Voltage: 220-240 Volt, 50-60 HZ

Protection class: II IP42

acc. to EN 60598.2.22

Product description

**Design:** Wall mounted LED Exit sign with a ‘box’ design, it offers much better aesthetics when compared to conventional exit-boxes, featuring an attractive Polycarbonate enclosure with a sloping front opal panel and screen printed safety sign legends to ensure even illumination. Measuring 333x160 mm, the LED exit sign provides a viewing distance of 30 metres. Configured for maintained operation as standard. Non maintained operation is available by excluding a switched live supply. Self Test or DALI operation available.

Product image




Technical Data

Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	3.6V 1.5Ah NiCd
Total Circuit Power Max	4.2W
Max Ambient Temperature	25°C
Ingress Protection	IP42
Weight	2400g
Conductor Size	0.5-2.5mm² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	20mm Knock-outs top and back
Viewing Distance	30m
Construction	PC base with screen printed opal PC legend panel

Drawing / Dimensions

Dimens. [mm]		
L	W	H
333	160	75

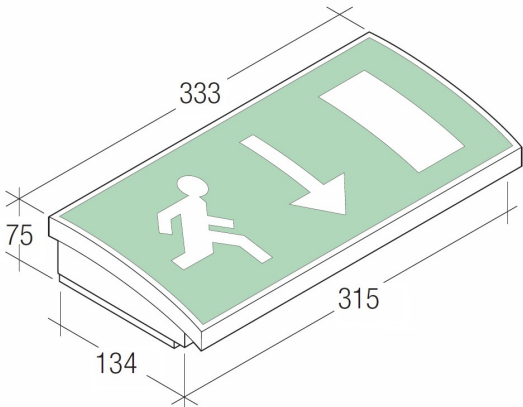

Order codes

ARK/NM3/WH	Wall Mounted, Maintained LED Exit Sign Luminaire	
Options	/230/WH	Mains Only LED Exit Sign Luminaire
	 /DALI	DALI/ Self Test (full self test function with no DALI connection)
Legends	/ECAR	EC Format - Arrow Right
	/ECAL	EC Format - Arrow Left
	/ECAD	EC Format - Arrow Down
	/ISOAR	ISO Format - Arrow Right
	/ISOAL	ISO Format - Arrow Left
	/ISOAU	ISO Format - Arrow Up