



Voltage:	220-240 Volt, 50-60 HZ
Protection class: II	IP65
acc. to EN 60598.2.22	

Product description

**Design:** IP65 rated Ceiling mounted LED Exit luminaire, features a hinged white painted steel gear tray and a 150mm deep opal diffuser providing double sided signage if required by fitting self-adhesive safety signs. The luminaire provides 150 lumens and the lens generates a wide intensity distribution ideal for providing good illuminance on the escape route. Available for normal mains lighting or with integral Maintained emergency lighting control gear using Nickel Cadmium batteries (non-maintained operation achieved by excluding a switch live supply).

Product image




Technical Data

Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	3.6V 1.5Ah NiCd
Total Circuit Power Max	3.2W
Max Ambient Temperature	0°C - 25°C
Ingress Protection	IP65
Weight	1100g
Conductor Size	0.5-2.5mm² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	20mm drilling points
Viewing Distance	32m (DDS versions)
Construction	White polycarbonate base and clear fresnel lens

Drawing / Dimensions

Dimens. [mm]		
L	W	H
350	120	90

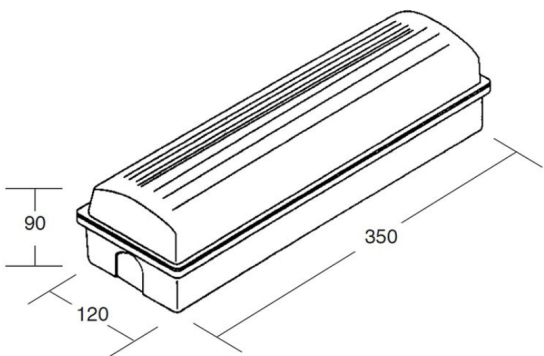

Order codes

AXILUM	IP65 ceiling mounted polycarbonate LED exit luminaire	
Options	/M3	Maintained
	/230	Mains Only
	/DALI	DALI/ Self Test (full self test function with no DALI connection)
	/DDS	Deep Double Sided exit sign diffuser
Legends	/LEG	Self adhesive legend kit

Spacing table

Mounting Height (m)	Trans. to wall	Trans. to trans.	Axial to Trans	Axial to Axial	Axial to wall	
2.5	1.6	5.9	4.3	3.0	1.0	1 Lux min. at centre
4.0	1.1	4.7	3.6	2.6	0.4	