



Voltage:	220-240 Volt, 50-60 HZ
Protection class:	I
	IP20
	acc. to EN 60598.2.22

Product description

Design: Slim wall mounted LED Exit sign features a welded steel housing, an internal Miro reflector and the sign panel features matrix dot coating to ensure even illumination of the safety sign legend. Measuring 315 x 190 mm, the LED exit sign provides a viewing distance of 28 metres. All versions are supplied with integral Maintained emergency lighting control gear. Functions as Self Test, central test, DALI and 24Volt versions for our DLS central battery system are also available.

Product image




Technical Data


Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	4.8V 0.9Ah NiMH
Total Circuit Power Max	3.1W
Max Ambient Temperature	0°C - 25°C
Ingress Protection	IP20
Weight	1700g
Conductor Size	0.5-2.5mm ² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	20mm (BESA) in rear
Viewing Distance	25m
Construction	Steel with PMMA legend panel

Drawing / Dimensions

Dimens. [mm]		
L	W	H
315	190	30

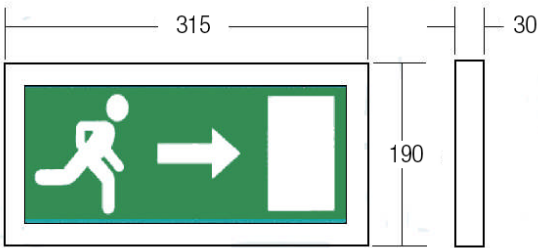

Order codes

F-LINE EXIT LED-TI	Wall Mounted LED exit sign
	/MX/M3 3 Hour Maintained, gloss white front plate, Arrow Down legend.
Options	/SG Textured Silver Grey finish
	/TW Textured white finish
	/DALI DALI/Self Test (full self test function with no DALI connection)
	/VCT Validate Central Test
Legends	/AL Arrow left
	/AR Arrow Right