



Voltage:	220-240 Volt, 50-60 HZ
Protection class:	II IP40
acc. to EN 60598.2.22	

Product description

Design: LED Exit sign suited to modern architectural environments. An attractive slim body design, surface mounted wire suspended, ESA09 size Small provides a viewing distance of 25m. The specially screen printed finish ensures a uniform illumination. Can be configured for non-maintained, maintained, switch maintained operation or Self-Test operation.

Product image




Technical Data

Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	(LiFePO4) 6.4V 600mAh standard 3.2V 3.2Ah ST
Total Circuit Power Max	2.6W
Max Ambient Temperature	25°C
Ingress Protection	IP40
Weight	2500g
Conductor Size	0.5-2.5mm² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	Top and back (first fix plate)
Viewing Distance	25m
Construction	Polycarbonate

Drawing / Dimensions

Dimens. [mm]		
L	W	H
265	45	155

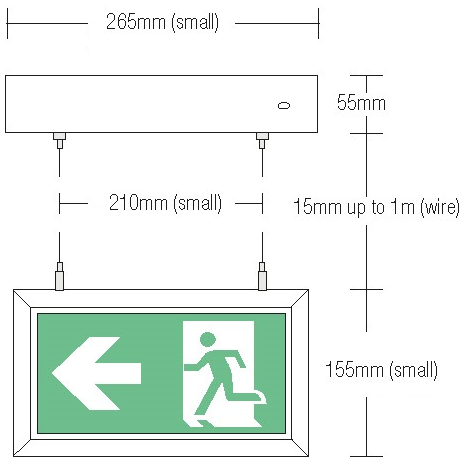

Order codes

QSN/ESA09/M3	Surface mounted wire suspended, Small for 25m viewing distance	
Options	/ST	Self-Test emergency operation
Legends	QSN/EC/ISO	Complete set of EC and ISO format legend panels