

RG ADDITIONS

ICEL

LED SELV

3h

IP40

LED

CE

Voltage: 220-240 Volt, 50-60 HZ

Protection class: II IP40

acc. to EN 60598.2.22

Product description

Design: LED Exit sign suited to modern architectural environments. An attractive slim body design, suitable for Fixed, wall/ceiling mounting, ESA10 size (large) provides a viewing distance of 30m. The specially screen printed finish ensures a uniform illumination. Can be configured for non-maintained, maintained or switch maintained operation. DALI or Self-Test operation.

Product image




Technical Data


Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	(LiFePO4) 6.4V 600mAh (standard) 3.2V 3.2Ah (DALI)
Total Circuit Power Max	3.1W
Max Ambient Temperature	25°C
Ingress Protection	IP40
Weight	2500g
Conductor Size	0.5-2.5mm² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	Top and back (first fix plate)
Viewing Distance	30m
Construction	Polycarbonate

Drawing / Dimensions

Dimens. [mm]		
L	W	H
330	45	195 (250)

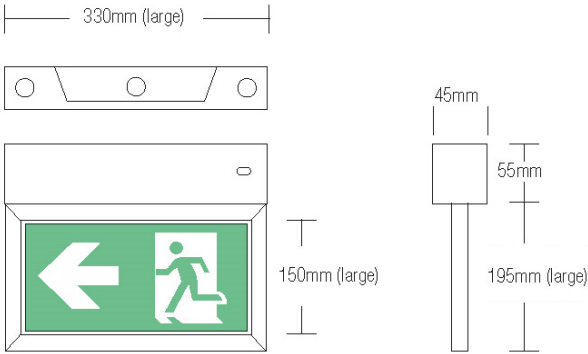

Order codes

QSN/ESA10/M3	Fixed wall/ceiling mounted, Large for 30m viewing distance	
Options		/DALI DALI / Self Test (full self test function with no DALI connection)
Legends	QSN/EC/ISO	Complete set of EC and ISO format legend panels