






RG ADDITIONS




















Voltage: 220-240 Volt, 50-60 HZ

Protection class: I IP20

acc. to EN 60598.2.22

Product description

Design: Ceiling mounted, recessed LED Exit sign suited to modern architectural environments. An attractive flat design with the exit legend being framed by a high quality Aluminium extrusion measuring just 237x137mm. The specially screened light-conducting panel ensures a uniform illumination and due to their high illuminance of >500cd/m² are ideal for use in brightly lit environments. Can be configured for non-maintained, maintained or switch maintained operation. Functions as stand-alone Self Test as standard or can be connected to a DALI system.

Product image





Technical Data

Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	LiFe 6.4V 1.5Ah (Lithium)
Total Circuit Power Max	4.8W
Max Ambient Temperature	25°C
Ingress Protection	IP20
Weight	3600g
Conductor Size	0.5-2.5mm² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	N/A
Viewing Distance	20m
Construction	Steel and Alu base/screen printed opal PC legend

Drawing / Dimensions

Dimens. [mm]		
L	W	H
237	14	137

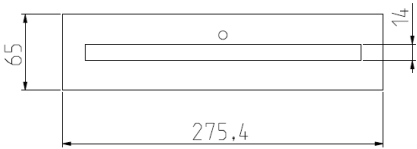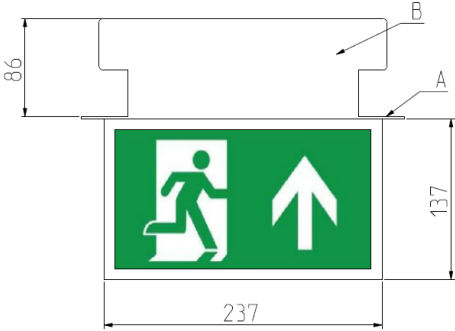

Order codes

SQL/RECE/DALI/WH	Ceiling Mounted, Recessed, White	
Options	/GR	Grey painted finish
	/DS	Double Sided
Legends	/ECAR	EC Format - Arrow Right
	/ECAL	EC Format - Arrow Left
	/ECAD	EC Format - Arrow Down
	/ISOAR	ISO Format - Arrow Right
	/ISOAL	ISO Format - Arrow Left
	/ISOAU	ISO Format - Arrow Up

Note: All high mounted versions share a common fixing plate 'A' and recessed gear tray 'B'.