



Voltage: 220-240 Volt, 50-60 HZ
Protection class: II IP20
acc. to EN 60598.2.22

Product description

Design: An attractive architectural surface/recessed illuminated safety sign. The edgelit legend is mounted on adjustable suspension wires that also provide the units power. the exit sign features long life >50,000hrs with very low power consumption.

The small discrete control gear housing can be surface mounted or semi-recessed. The legend is retained by an aluminium extrusion.

A full range of legend options are available, complying with both EC and ISO standard formats.

Product image




Technical Data

Supply Voltage/Frequency	230VAC / 50-60Hz
Battery Type	3.6V 900Ah NiCd
Total Circuit Power Max	2.1W
Max Ambient Temperature	25°C
Ingress Protection	IP20
Weight	2500g
Conductor Size	0.5-2.5mm ² max
CCT	>4500K
Emergency Duration	3 Hours
Recharge Period	24 Hrs
Cable Entry	20mm hole in ceiling plate
Viewing Distance	32m
Construction	Polycarbonate with PMMA legend panel

Drawing / Dimensions

Dimens. [mm]		
L	W	H
340	45	185

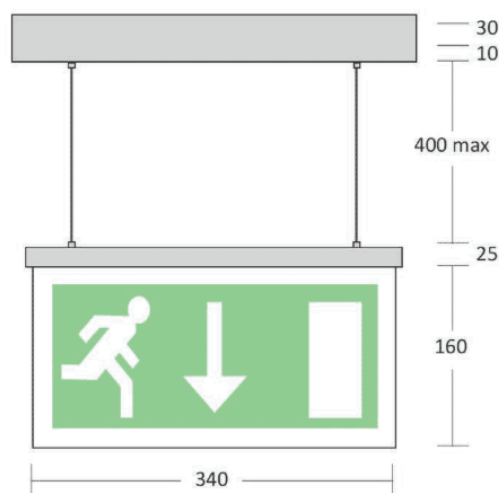

Order codes

97-USMZ/M3	Description	Code
Legend option	EC Format - Arrow Right	/ECAR
Legend option	EC Format - Arrow Left	/ECAL
Legend option	EC Format - Arrow Down	/ECAD
Legend option	ISO Format - Arrow Right	/ISOAR
Legend option	ISO Format - Arrow Left	/ISOAL
Legend option	ISO Format - Arrow Up	/ISOAU