



Spectral®

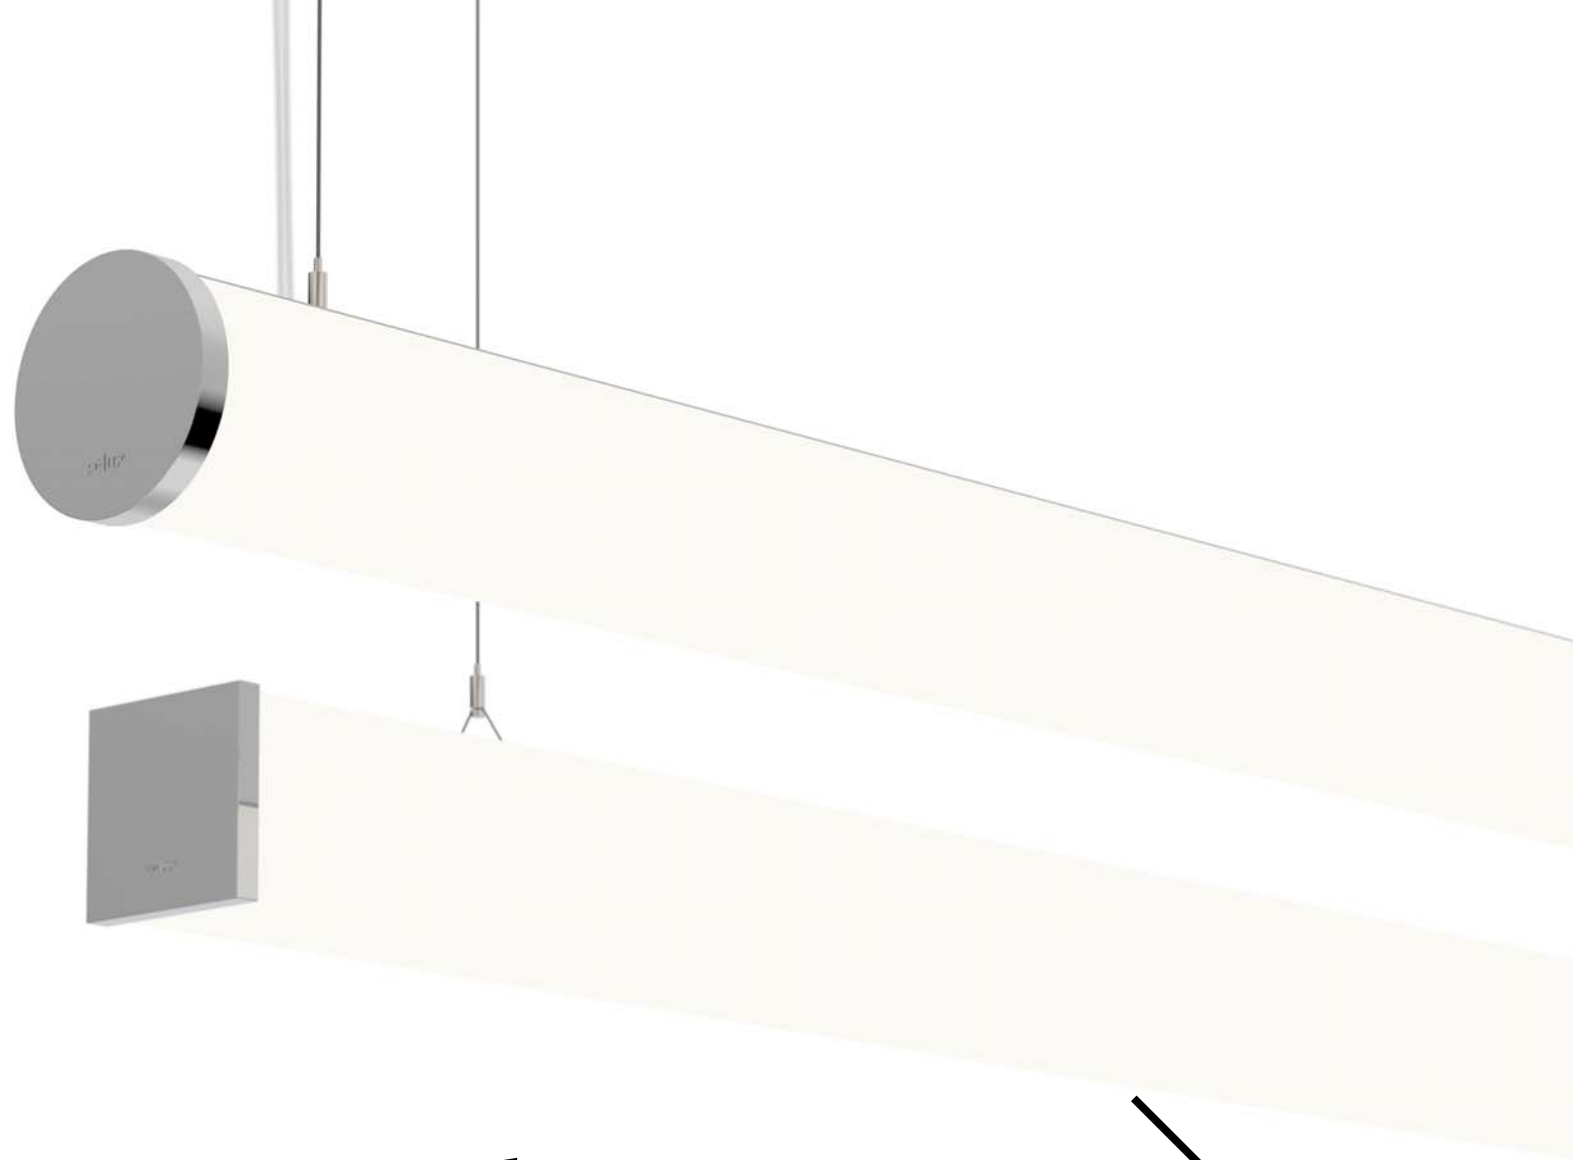

Purelight by Spectral.


LOOKBOOK 1.0



Spectral®

Pure. light.

- RP = round pendant (1.)
- RA = round surface (2.)
- pendants up to 4,7 m long in one single piece (special order)
- wall mount, vertically or horizontally

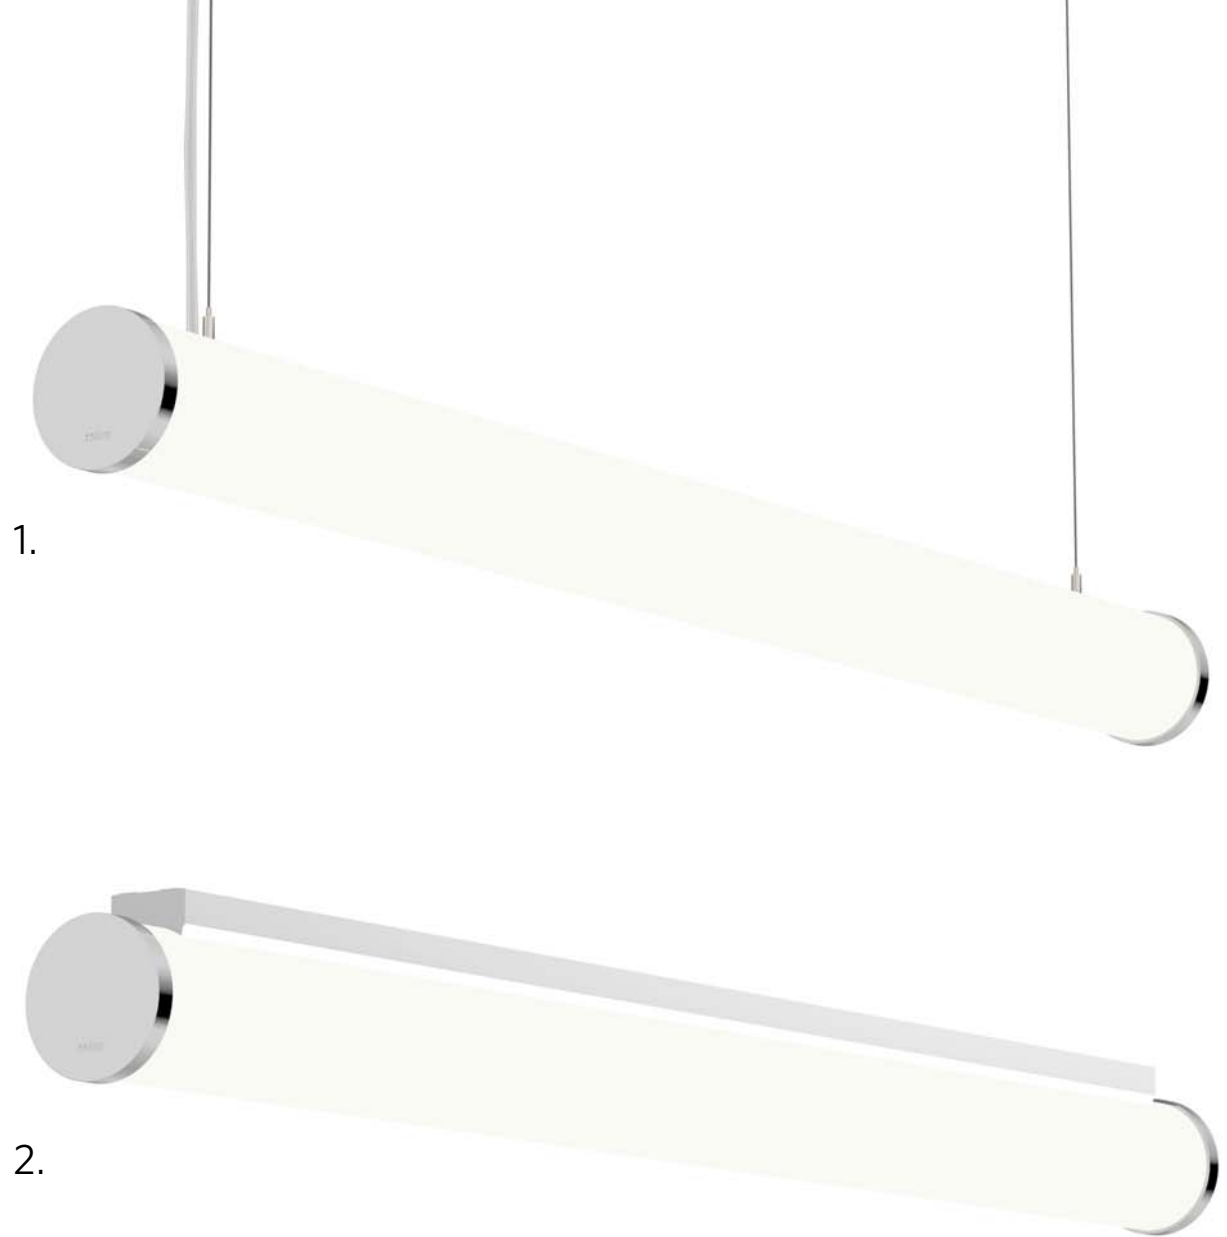



Spectral[®]

Cylindrical lightness.

- homogeneous light
- gentle glare free light
- timeless style

Spectral®

Technical and general information.

- 90mm diameter tubular or 90mm square section body
- standard lengths round (R): 903 mm / 1198 mm / 1494 mm / 1789 mm / 2380 mm
- standard lengths square (Q): 912 mm / 1207 mm / 1503 mm / 1798 mm / 2389 mm
- up to 4,700 mm long to special order
- Spectral quality: extruded aluminium, die cast polished aluminium ends
- impact resistant PMMA frosted diffuser
- very easy installation and maintenance
- integral Dali power supply for stepless light control
- single clear power cable pre wired at the factory
- integral emergency versions available
- 3000 k / 4000 k / tunable white 2700-6500 k
- powerful range from 4000 lm - 10.000 lm
- very efficient with up to 144 lm/W

Spectral[®]

Project solution.


University library,
Freiburg



Spectral®


Scale your Purelight.

- choose your length:
(round / square)
 1. 903 / 912 mm
 2. 1198 / 1207 mm
 3. 1494 / 1503 mm
 4. 1789 / 1798 mm
 5. 2380 / 2389 mm

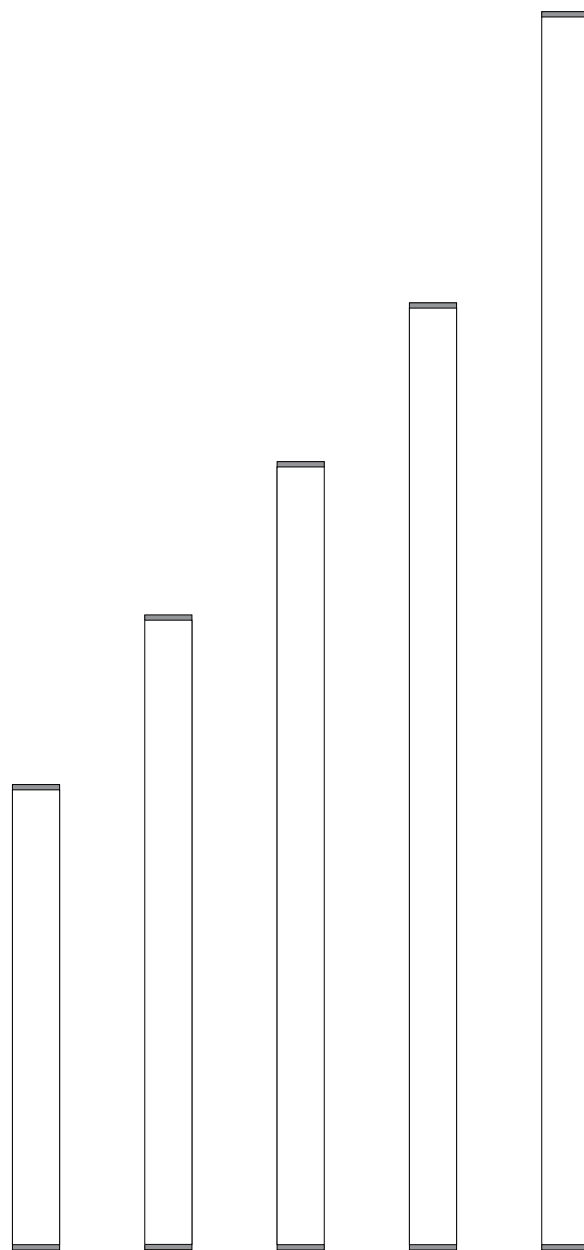

1. 2. 3. 4. 5.


Spectral®

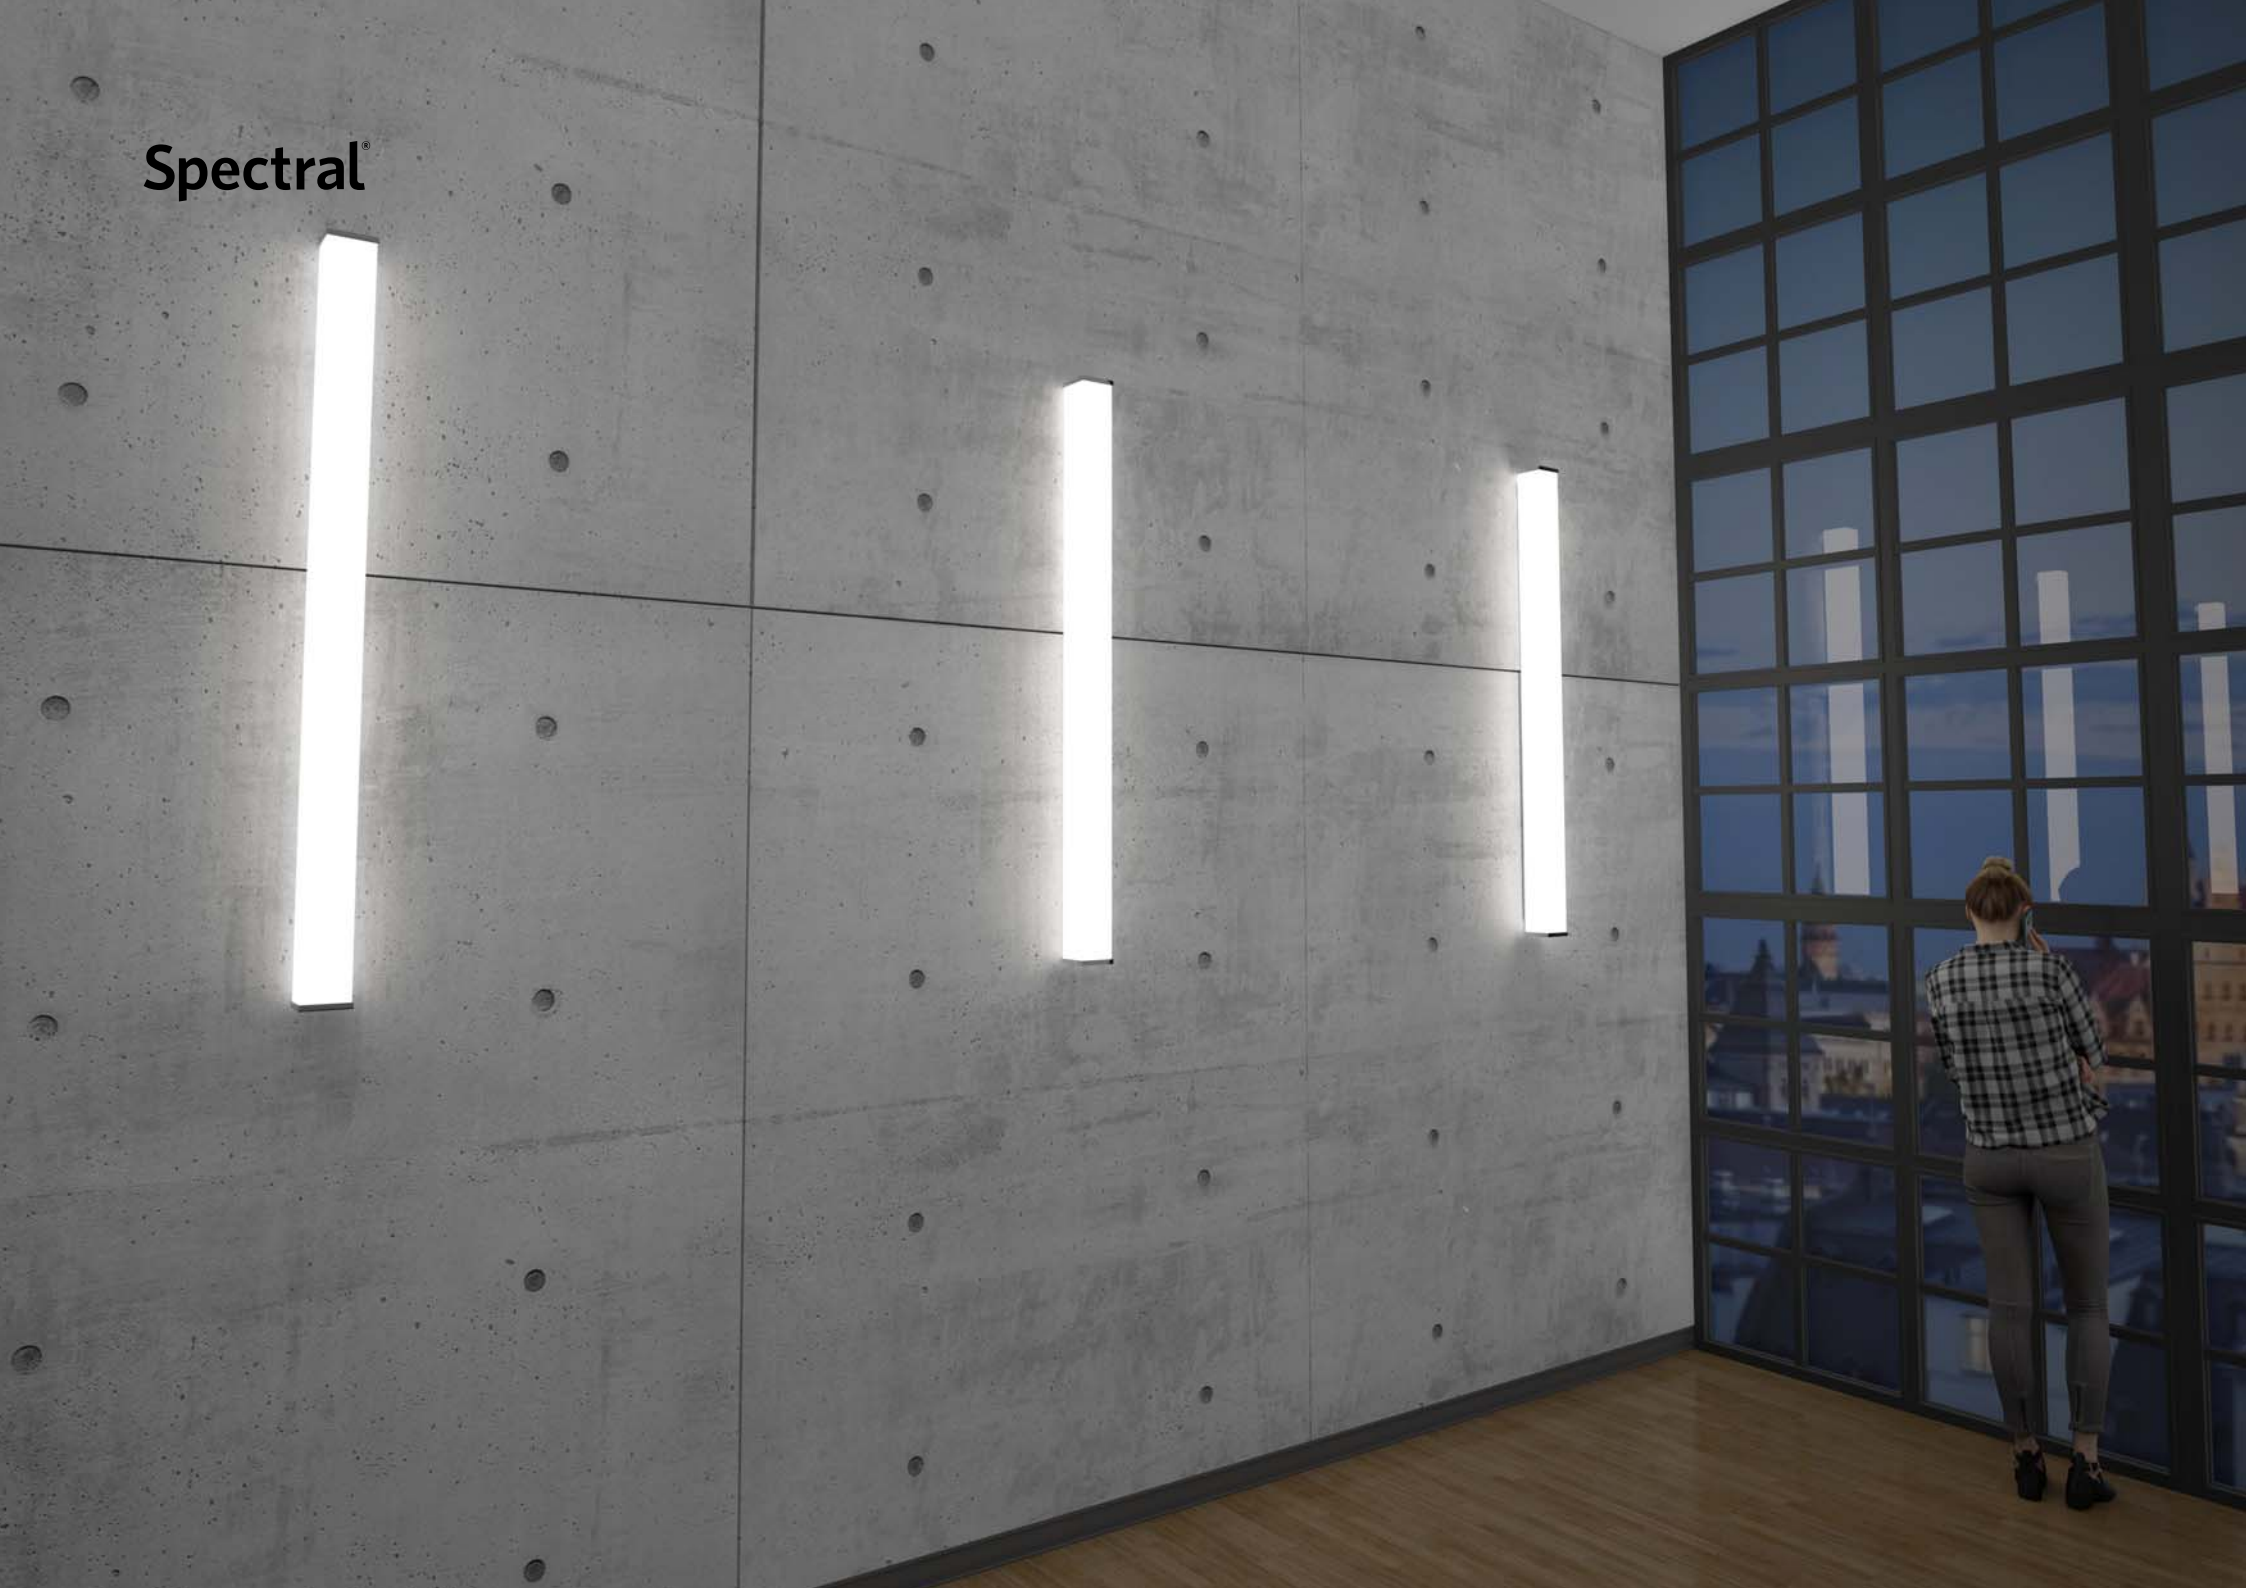

Spectral[®]

Purelight-RP.

- round pendant
- 90 mm diameter

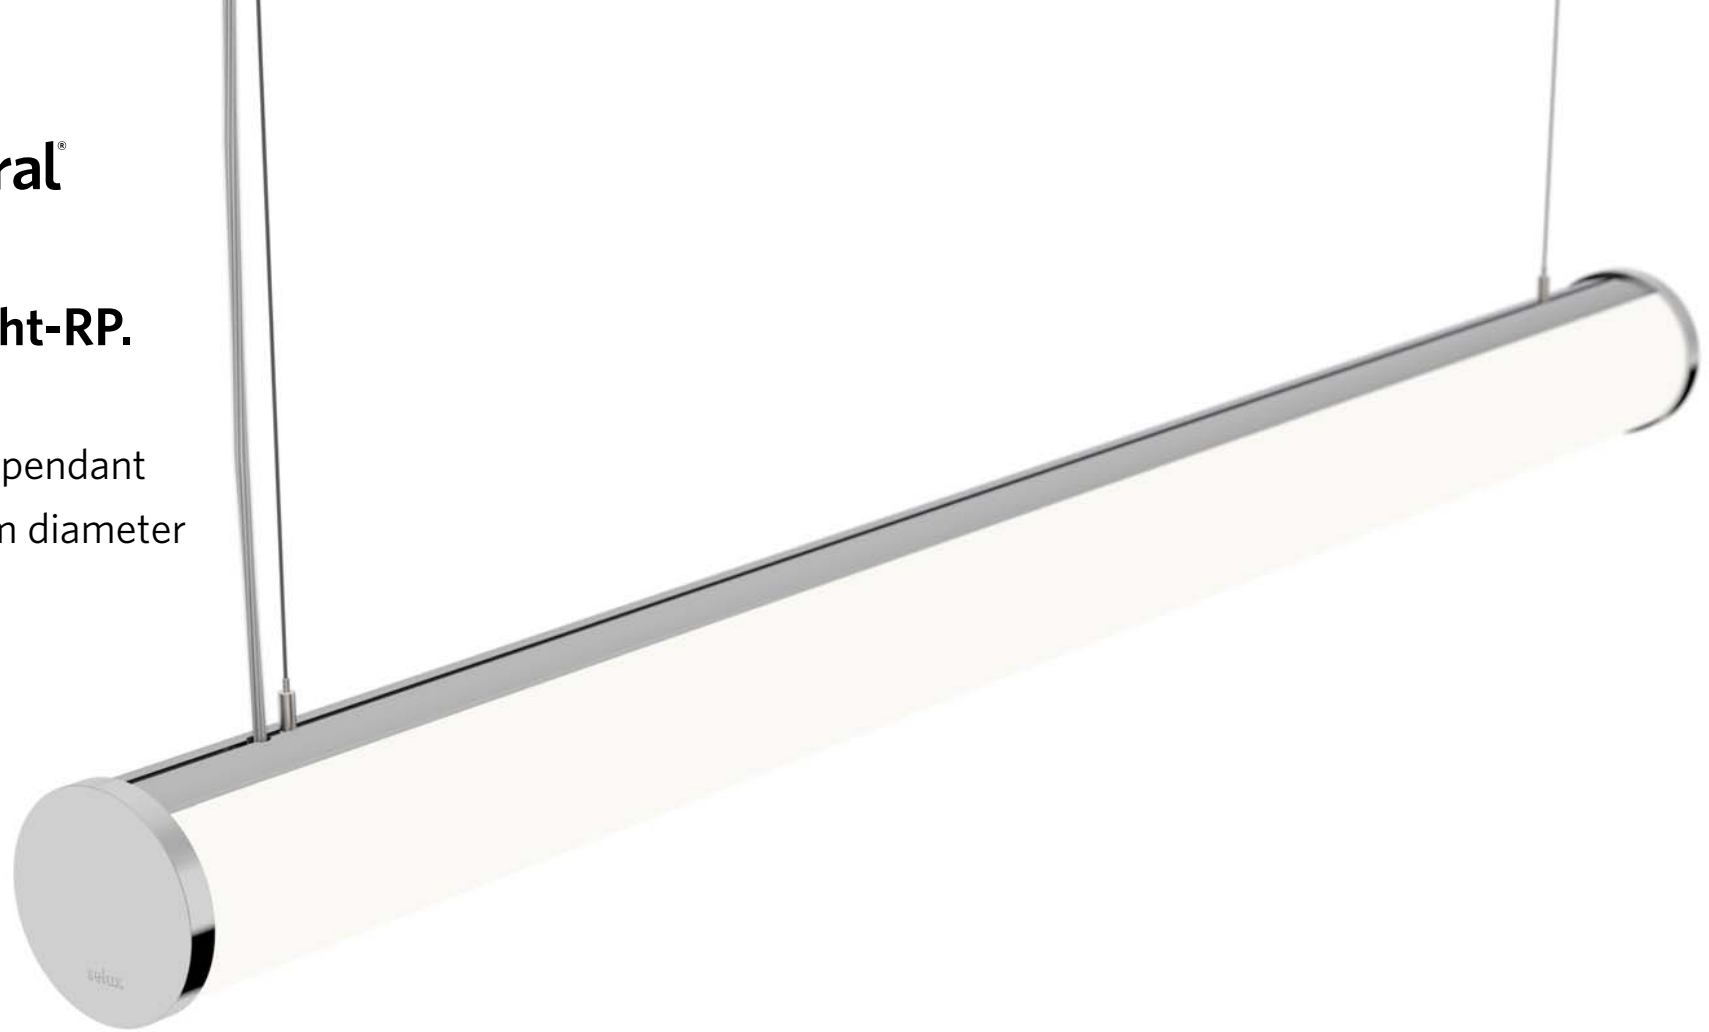


Spectral[®]

Purelight-QP.

- square pendant
- 90 mm edge length



Spectral®

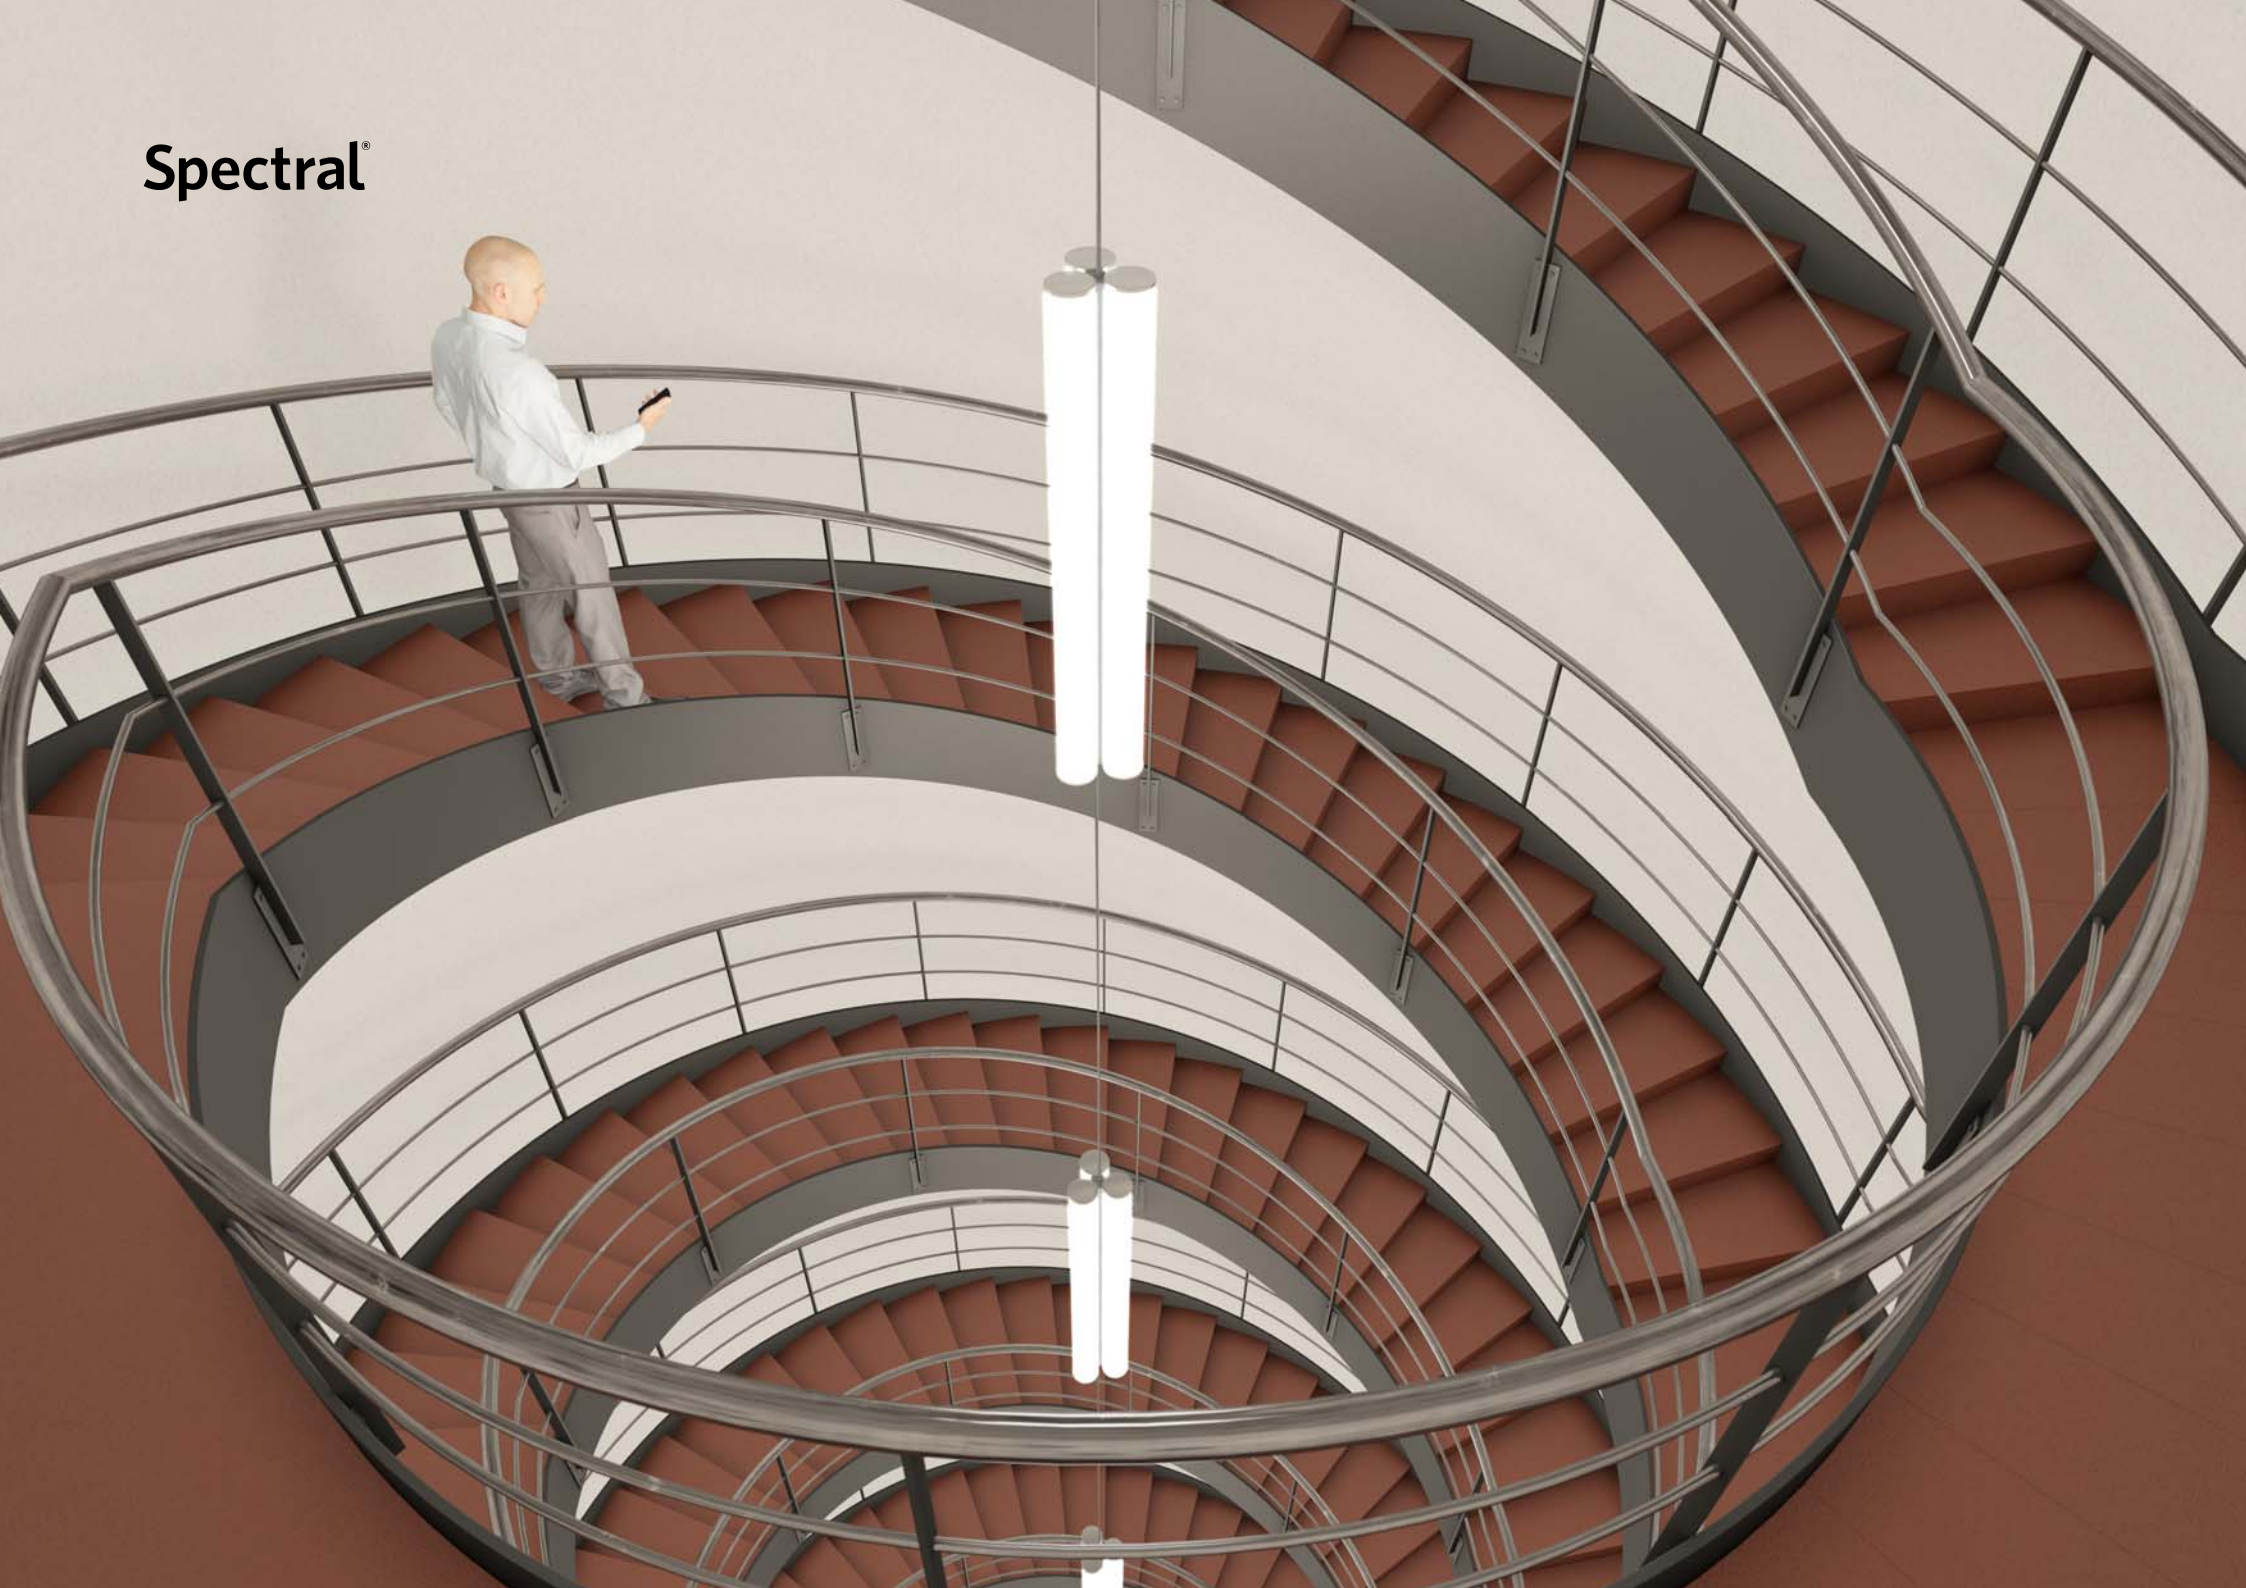

Spectral®

Open to ideas.

- many configurations possible
- tailor the light to your project





Spectral®

**Bend the rules -
for unique lighting
solutions.**

**Spectral. Eine Marke
der RIDI GROUP**

RIDI Leuchten GmbH
Hauptstraße 31 - 33
72417 Jungingen
Tel.: + 49 7477 872 - 0
Fax.: + 49 7477 872 - 48
info@spectral-lighting.com
www.spectral-lighting.com