


## Luminaire type

|                    |                               |
|--------------------|-------------------------------|
| Product reference: | IL4-WS-1132-840M-DADI-OP-FGED |
| Article Number:    | 97-IL400018ED                 |
| Product type:      | Pendant                       |
| Mounting type:     | Pendant                       |
| Applications:      | Office, General and Retail    |


## Specification text

Pendant luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 22. Light output of 3548lm with an efficacy of 126lm/W. Light source colour temperature 4000KK and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1132 x W40 x H62mm. Finished in Grey.

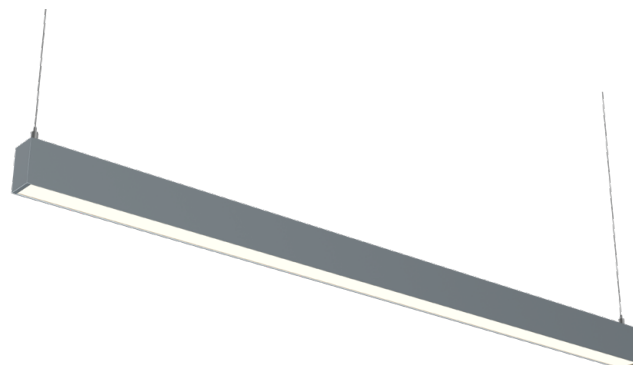

## Lighting performance

|                               |             |
|-------------------------------|-------------|
| Output lumens:                | 3548 lm     |
| Efficacy:                     | 126 lm/W    |
| Rated power:                  | 28.1 W      |
| Control gear:                 | DALI        |
| Dimming range:                | 1-100%      |
| DC Suitable:                  | Yes         |
| Colour temperature:           | 4000K K     |
| MacAdams                      | < 3         |
| CRI:                          | 85          |
| Radiation pattern:            | Symmetrical |
| Beam angle:                   | Wide        |
| Unified glare rating (U.G.R): | 22          |

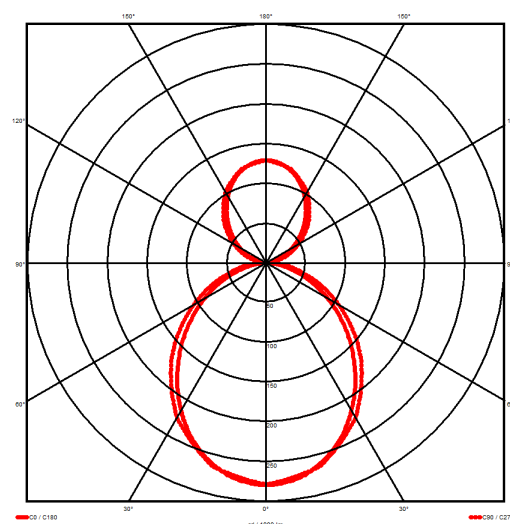

## Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1132 mm |
| Width:     | 40 mm   |
| Height:    | 62 mm   |
| IP Rating: | IP20    |

