

- +44(0)1279 450882
- (WWW.RIDI-GROUP.CO.UK
- SALES@RIDI.CO.UK

Luminaire type


Product reference: IL6-R-1487-830M-DAD-MP-FGE

Article Number: 97-IL400322E
Product type: Recessed
Mounting type: Recessed

Applications: Office, General and Retail

Specification text


Recessed luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 19. Light output of 2691lm with an efficacy of 105lm/W. Light source colour temperature 3000KK and CRI 85. Complete with DALI control gear and manual test 3hr emergency. Nominal dimensions L1487 x W54 x H85mm. Finished in Grey.

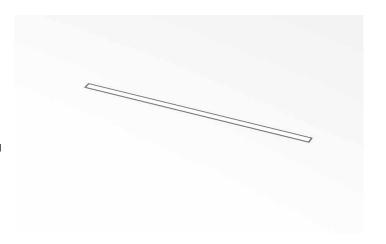

Lighting performance

2691 lm Output lumens: 105 lm/W Efficacy: Rated power: 25.7 W Control gear: DALI Dimming range: 1-100% DC Suitable: Yes Colour temperature: 3000KK < 3 MacAdams CRI: 85

Radiation pattern: Symmetrical Beam angle: Wide
Unified glare rating (U.G.R): 19



Physical details

 Finish:
 Grey

 Length:
 1487 mm

 Width:
 54 mm

 Height:
 85 mm

 IP Rating:
 IP20





