# iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK

### Luminaire type


Product reference: Article Number: Product type: Mounting type: Applications: IL6-S-1198-830M-DAD-MP-FG 97-IL600039 Surface Mount Surface Office, General and Retail

#### **Specification text**

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2386.2lm with an efficacy of 114lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear. Nominal dimensions L1198 x W60 x H80mm. Finished in Grey.

2386.2 lm 114 lm/W 21 W DALI 1-100% Yes 3000 K < 3 85

Symmetrical Wide <19

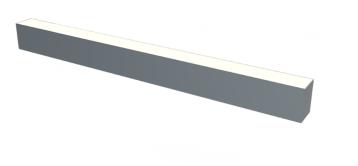

## Lighting performance


Output lumens:
Efficacy:
Rated power:
Control gear:
Dimming range:
DC Suitable:
Colour temperature:
MacAdams
CRI:
Radiation pattern:
Beam angle:
Unified glare rating (U.G.R):

#### **Physical details**

Finish:		
Length:		
Width:		
Height:		
IP Rating:		

Grey
1198 mm
60 mm
80 mm
IP20





# lightworks

RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.