iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK

Luminaire type

| Product reference: |
|--------------------|
| Article Number: |
| Product type: |
| Mounting type: |
| Applications: |


IL6-S-1198-830M-DAD-MP-FGES 97-IL600039ES Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2386.2lm with an efficacy of 114lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and self test 3hr emergency. Nominal dimensions L1198 x W60 x H80mm. Finished in Grey.

2386.2 lm 114 lm/W 21 W DALI 1-100% Yes 3000 K < 3 85

Symmetrical Wide <19

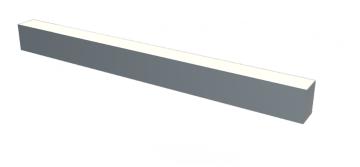

Lighting performance


| Output lumens: | | | |
|-------------------------------|--|--|--|
| Efficacy: | | | |
| Rated power: | | | |
| Control gear: | | | |
| Dimming range: | | | |
| DC Suitable: | | | |
| Colour temperature: | | | |
| MacAdams | | | |
| CRI: | | | |
| Radiation pattern: | | | |
| Beam angle: | | | |
| Unified glare rating (U.G.R): | | | |

Physical details

| Finish: | | |
|------------|--|--|
| Length: | | |
| Width: | | |
| Height: | | |
| IP Rating: | | |
| | | |







lightworks

RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.