iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK


Luminaire type

| Product reference: |
|--------------------|
| Article Number: |
| Product type: |
| Mounting type: |
| Applications: |

IL6-S-1478-830M-DAD-MP-FW 97-IL600237 Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2947.83lm with an efficacy of 113lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear. Nominal dimensions L1478 x W60 x H80mm. Finished in White.

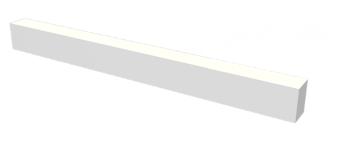

Lighting performance


| Output lumens: | 2947.83 lm |
|-------------------------------|-------------|
| Efficacy: | 113 lm/W |
| Rated power: | 23 W |
| Control gear: | DALI |
| Dimming range: | 1-100% |
| DC Suitable: | Yes |
| Colour temperature: | 3000 K |
| MacAdams | < 3 |
| CRI: | 85 |
| Radiation pattern: | Symmetrical |
| Beam angle: | Wide |
| Unified glare rating (U.G.R): | <19 |
| | |

Physical details

| Finish: | | |
|------------|--|--|
| Length: | | |
| Width: | | |
| Height: | | |
| IP Rating: | | |
| | | |







lightworks

RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.