iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK


Luminaire type

Product reference:
Article Number:
Product type:
Mounting type:
Applications:

IL6-S-1478-830M-DAD-MP-FWES 97-IL600237ES Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2947.83Im with an efficacy of 113Im/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and self test 3hr emergency. Nominal dimensions L1478 x W60 x H80mm. Finished in White.

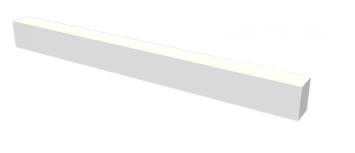

Lighting performance


Output lumens:	2947.83 lm
Efficacy:	113 lm/W
Rated power:	23 W
Control gear:	DALI
Dimming range:	1-100%
DC Suitable:	Yes
Colour temperature:	3000 K
MacAdams	< 3
CRI:	85
Radiation pattern:	Symmetrical
Beam angle:	Wide
Unified glare rating (U.G.R):	<19

Physical details

Finish:		
Length:		
Width:		
Height:		
IP Rating:		









RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.