

Luminaire type

| | |
|--------------------|-----------------------------|
| Product reference: | IL6-R-1494-830M-DAD-OP-FGES |
| Article Number: | 97-IL600328ES |
| Product type: | Recessed |
| Mounting type: | Recessed |
| Applications: | Office, General and Retail |


Specification text

Recessed luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 3199.06lm with an efficacy of 123lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and self test 3hr emergency. Nominal dimensions L1494 x W76 x H76.5mm. Finished in Grey.



Lighting performance

| | |
|--------------------------------|-------------|
| Output lumens: | 3199.06 lm |
| Efficacy: | 123 lm/W |
| Rated power: | 0 W |
| Control gear: | DALI |
| Dimming range: | 1-100% |
| DC Suitable: | Yes |
| Colour temperature: | 3000 K |
| MacAdams | < 3 |
| CRI: | 85 |
| Radiation pattern: | Symmetrical |
| Beam angle: | Wide |
| Unified glare rating (U.G.R.): | <22 |

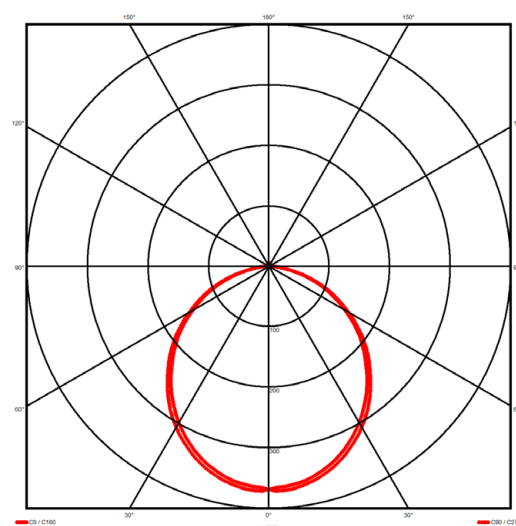

Physical details

| | |
|------------|---------|
| Finish: | Grey |
| Length: | 1494 mm |
| Width: | 76 mm |
| Height: | 76.5 mm |
| IP Rating: | IP20 |

