# iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK

#### Luminaire type

Product reference:
Article Number:
Product type:
Mounting type:
Applications:


IL6-S-1968-830M-DAD-MP-FWE 97-IL600437E Surface Mount Surface Office, General and Retail

#### **Specification text**

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 3930.44lm with an efficacy of 114lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and manual test 3hr emergency. Nominal dimensions L1968 x W60 x H80mm. Finished in White.

3930.44 lm 114 lm/W 30.6 W DALI 1-100% Yes 3000 K < 3 85

Symmetrical Wide <19

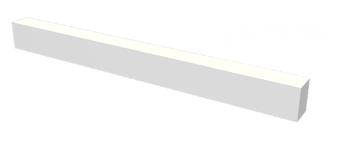

#### Lighting performance


Output lumens:
Efficacy:
Rated power:
Control gear:
Dimming range:
DC Suitable:
Colour temperature:
MacAdams
CRI:
Radiation pattern:
Beam angle:
Unified glare rating (U.G.R):

#### **Physical details**

Finish:	
Length:	
Width:	
Height:	
IP Rating:	

### White 1968 mm 60 mm 80 mm IP20





## lightworks

RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.