iline 6

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK

SALES@RIDI.CO.UK

Luminaire type

Product reference:
Article Number:
Product type:
Mounting type:
Applications:


IL6-S-1968-830M-DAD-MP-FWED 97-IL600437ED Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 3930.44lm with an efficacy of 114lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1968 x W60 x H80mm. Finished in White.

3930.44 lm 114 lm/W 30.6 W DALI 1-100% Yes 3000 K < 3 85

Symmetrical Wide <19

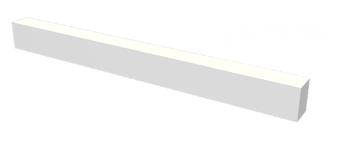

Lighting performance


Output lumens:
Efficacy:
Rated power:
Control gear:
Dimming range:
DC Suitable:
Colour temperature:
MacAdams
CRI:
Radiation pattern:
Beam angle:
Unified glare rating (U.G.R):

Physical details

Finish:	
Length:	
Width:	
Height:	
IP Rating:	









RIDI

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 21/03/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.