


## Luminaire type

|                    |                             |
|--------------------|-----------------------------|
| Product reference: | IL6-R-1984-840M-DAD-OP-FBED |
| Article Number:    | 97-IL600530ED               |
| Product type:      | Recessed                    |
| Mounting type:     | Recessed                    |
| Applications:      | Office, General and Retail  |


## Specification text

Recessed luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 4397lm with an efficacy of 127lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1984 x W76 x H76.5mm. Finished in Black.

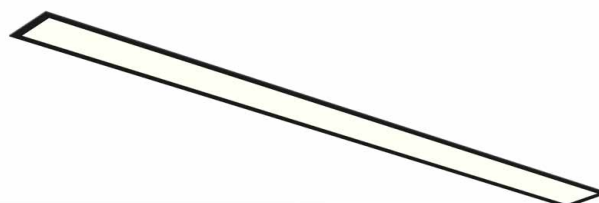

## Lighting performance

|                                |             |
|--------------------------------|-------------|
| Output lumens:                 | 4397 lm     |
| Efficacy:                      | 127 lm/W    |
| Rated power:                   | 0 W         |
| Control gear:                  | DALI        |
| Dimming range:                 | 1-100%      |
| DC Suitable:                   | Yes         |
| Colour temperature:            | 4000 K      |
| MacAdams                       | < 3         |
| CRI:                           | 85          |
| Radiation pattern:             | Symmetrical |
| Beam angle:                    | Wide        |
| Unified glare rating (U.G.R.): | <22         |

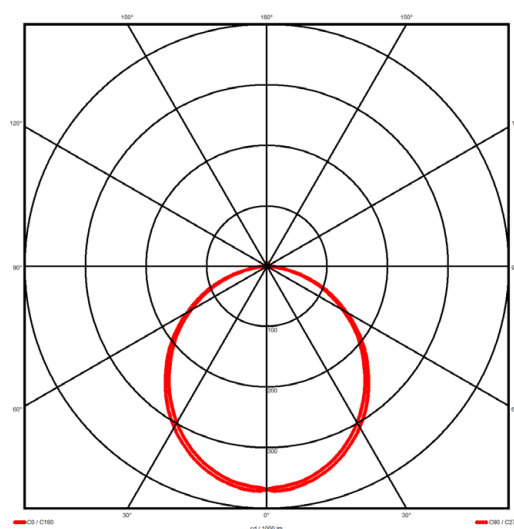

## Physical details

|            |         |
|------------|---------|
| Finish:    | Black   |
| Length:    | 1984 mm |
| Width:     | 76 mm   |
| Height:    | 76.5 mm |
| IP Rating: | IP20    |

