


Luminaire type

Product reference:	IL6P-S-1144-840M-DAD-MP-FGED
Article Number:	97-IL6P0045ED
Product type:	Surface Mount
Mounting type:	Surface
Applications:	Office, General and Retail


Specification text

Surface Mount luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2452lm with an efficacy of 139lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1144 x W65 x H90mm. Finished in Grey.

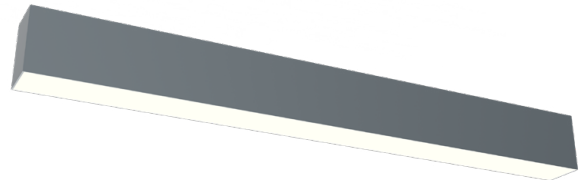

Lighting performance

Output lumens:	2452 lm
Efficacy:	139 lm/W
Rated power:	17.65 W
Control gear:	DALI
Dimming range:	1-100%
DC Suitable:	Yes
Colour temperature:	4000 K
MacAdams	< 3
CRI:	85
Radiation pattern:	Symmetrical
Beam angle:	Wide
Unified glare rating (U.G.R):	<19

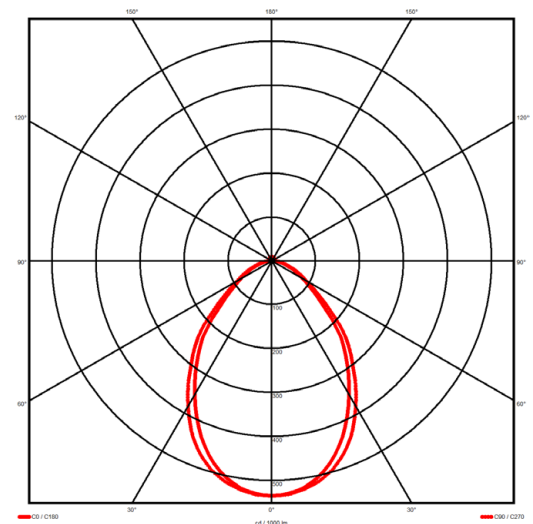

Physical details

Finish:	Grey
Length:	1144 mm
Width:	65 mm
Height:	90 mm
IP Rating:	IP20

