


## Luminaire type

|                    |                                |
|--------------------|--------------------------------|
| Product reference: | IL6P-WS-1494-840M-DADI-OP-FGED |
| Article Number:    | 97-IL6P0218ED                  |
| Product type:      | Pendant                        |
| Mounting type:     | Pendant                        |
| Applications:      | Office, General and Retail     |


## Specification text

Pendant luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 6511lm with an efficacy of 140lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1494 x W65 x H90mm. Finished in Grey.

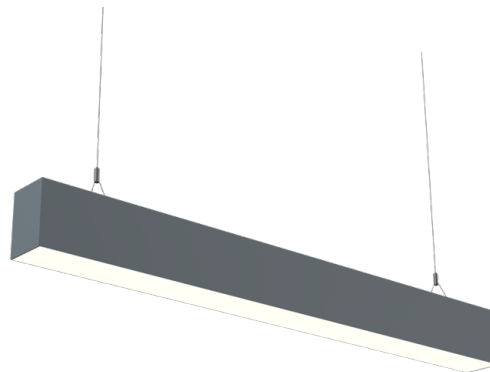

## Lighting performance

|                                |             |
|--------------------------------|-------------|
| Output lumens:                 | 6511 lm     |
| Efficacy:                      | 140 lm/W    |
| Rated power:                   | 46.5 W      |
| Control gear:                  | DALI        |
| Dimming range:                 | 1-100%      |
| DC Suitable:                   | Yes         |
| Colour temperature:            | 4000 K      |
| MacAdams                       | < 3         |
| CRI:                           | 85          |
| Radiation pattern:             | Symmetrical |
| Beam angle:                    | Wide        |
| Unified glare rating (U.G.R.): | <22         |

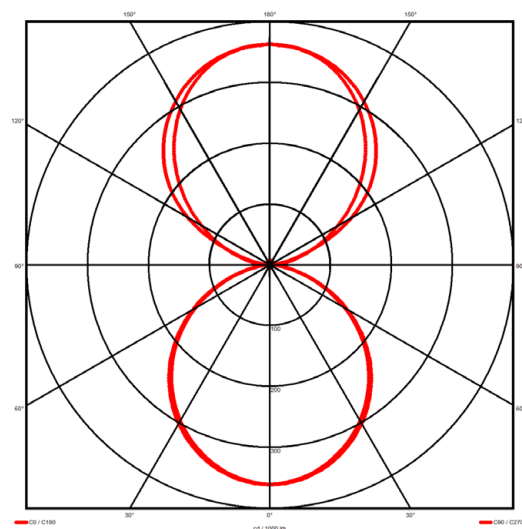

## Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1494 mm |
| Width:     | 65 mm   |
| Height:    | 90 mm   |
| IP Rating: | IP20    |

