


## Luminaire type

|                    |                            |
|--------------------|----------------------------|
| Product reference: | IL6P-S-1494-830M-DAD-MP-FG |
| Article Number:    | 97-IL6P0239                |
| Product type:      | Surface Mount              |
| Mounting type:     | Surface                    |
| Applications:      | Office, General and Retail |


## Specification text

Surface Mount luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 3106lm with an efficacy of 134lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear. Nominal dimensions L1494 x W65 x H90mm. Finished in Grey.

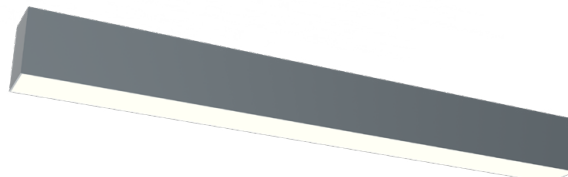

## Lighting performance

|                               |             |
|-------------------------------|-------------|
| Output lumens:                | 3106 lm     |
| Efficacy:                     | 134 lm/W    |
| Rated power:                  | 23 W        |
| Control gear:                 | DALI        |
| Dimming range:                | 1-100%      |
| DC Suitable:                  | Yes         |
| Colour temperature:           | 3000 K      |
| MacAdams                      | < 3         |
| CRI:                          | 85          |
| Radiation pattern:            | Symmetrical |
| Beam angle:                   | Wide        |
| Unified glare rating (U.G.R): | <19         |

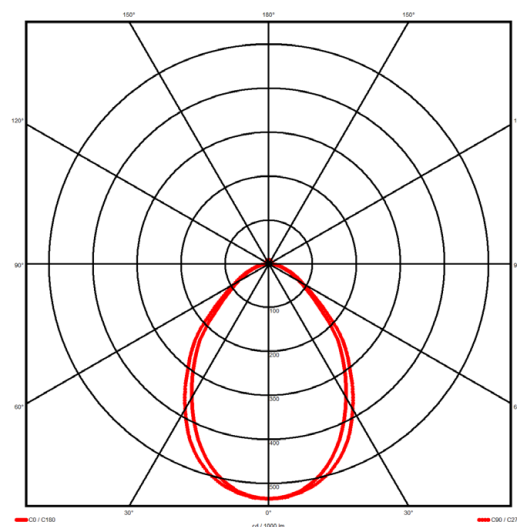

## Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1494 mm |
| Width:     | 65 mm   |
| Height:    | 90 mm   |
| IP Rating: | IP20    |

