

Luminaire type

Product reference: IL6P-S-1494-835M-DAD-OP-FWED
 Article Number: 97-IL6P0249ED
 Product type: Surface Mount
 Mounting type: Surface
 Applications: Office, General and Retail


Specification text

Surface Mount luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 3085lm with an efficacy of 134lm/W. Light source colour temperature 3500K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1494 x W65 x H90mm. Finished in White.



Lighting performance

Output lumens: 3085 lm
 Efficacy: 134 lm/W
 Rated power: 23 W
 Control gear: DALI
 Dimming range: 1-100%
 DC Suitable: Yes
 Colour temperature: 3500 K
 MacAdams < 3
 CRI: 85
 Radiation pattern: Symmetrical
 Beam angle: Wide
 Unified glare rating (U.G.R): <22

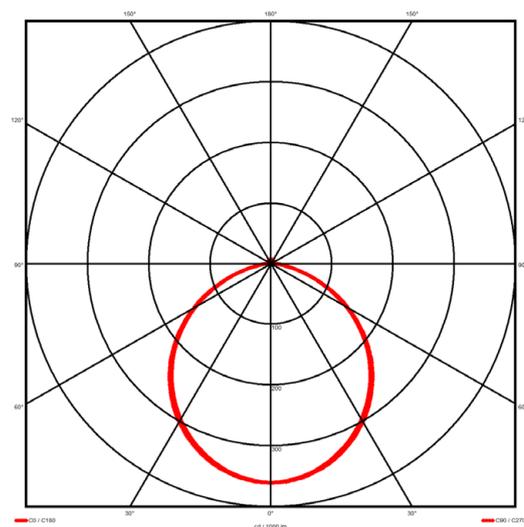

Physical details

Finish: White
 Length: 1494 mm
 Width: 65 mm
 Height: 90 mm
 IP Rating: IP20

