


Luminaire type

| | |
|--------------------|------------------------------|
| Product reference: | IL6P-S-1984-835M-DAD-OP-FWED |
| Article Number: | 97-IL6P0449ED |
| Product type: | Surface Mount |
| Mounting type: | Surface |
| Applications: | Office, General and Retail |


Specification text

Surface Mount luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 4096lm with an efficacy of 134lm/W. Light source colour temperature 3500K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1984 x W65 x H90mm. Finished in White.

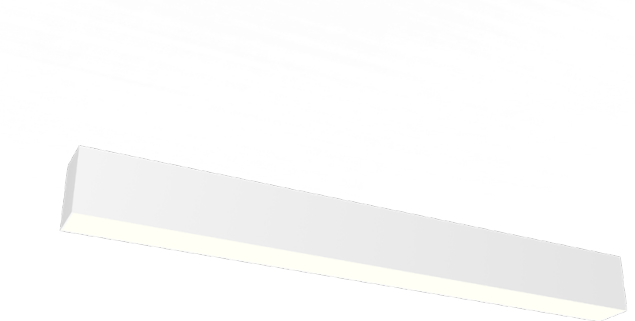

Lighting performance

| | |
|-------------------------------|-------------|
| Output lumens: | 4096 lm |
| Efficacy: | 134 lm/W |
| Rated power: | 30.6 W |
| Control gear: | DALI |
| Dimming range: | 1-100% |
| DC Suitable: | Yes |
| Colour temperature: | 3500 K |
| MacAdams | < 3 |
| CRI: | 85 |
| Radiation pattern: | Symmetrical |
| Beam angle: | Wide |
| Unified glare rating (U.G.R): | <22 |

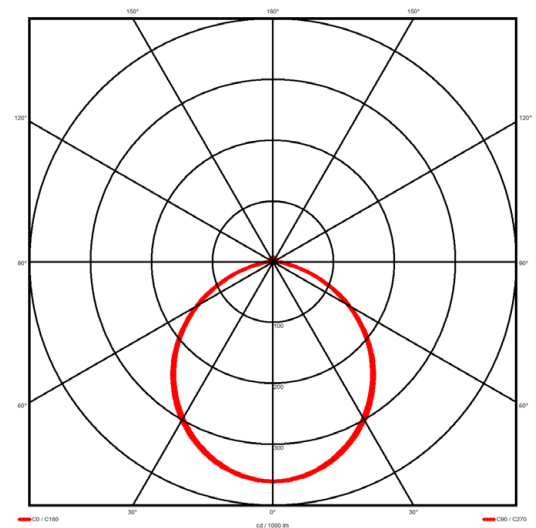

Physical details

| | |
|------------|---------|
| Finish: | White |
| Length: | 1984 mm |
| Width: | 65 mm |
| Height: | 90 mm |
| IP Rating: | IP20 |

