


## Luminaire type

|                    |                              |
|--------------------|------------------------------|
| Product reference: | IL6P-S-1984-835M-DAD-OP-FGES |
| Article Number:    | 97-IL6P0451ES                |
| Product type:      | Surface Mount                |
| Mounting type:     | Surface                      |
| Applications:      | Office, General and Retail   |


## Specification text

Surface Mount luminaire from the iline PRO 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 4096lm with an efficacy of 134lm/W. Light source colour temperature 3500K and CRI 85. Complete with DALI control gear and self test 3hr emergency. Nominal dimensions L1984 x W65 x H90mm. Finished in Grey.

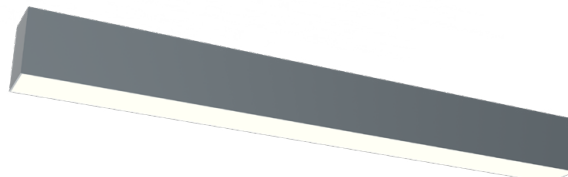

## Lighting performance

|                               |             |
|-------------------------------|-------------|
| Output lumens:                | 4096 lm     |
| Efficacy:                     | 134 lm/W    |
| Rated power:                  | 30.6 W      |
| Control gear:                 | DALI        |
| Dimming range:                | 1-100%      |
| DC Suitable:                  | Yes         |
| Colour temperature:           | 3500 K      |
| MacAdams                      | < 3         |
| CRI:                          | 85          |
| Radiation pattern:            | Symmetrical |
| Beam angle:                   | Wide        |
| Unified glare rating (U.G.R): | <22         |

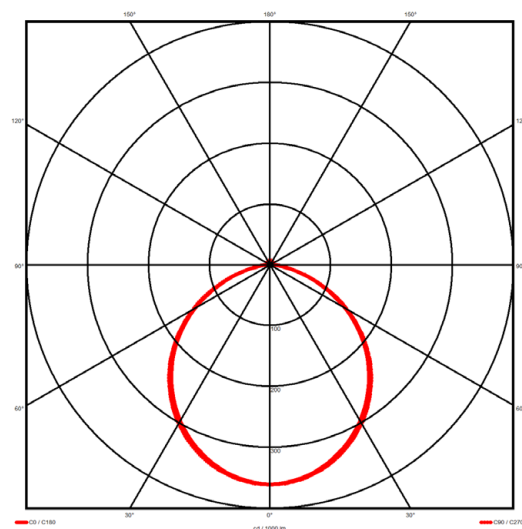

## Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1984 mm |
| Width:     | 65 mm   |
| Height:    | 90 mm   |
| IP Rating: | IP20    |

