

KOALA

RIDI UK

Additions by Avolux

+44 (0) 1279 450882
WWW.RIDI.CO.UK
SALES@RIDI.CO.UK

Luminaire type

| | |
|--------------------|-------------------|
| Product reference: | KOALA-850-M-DA-SW |
| Article Number: | 97-KOA0185 |
| Product type: | Wall Light |
| Mounting type: | Wall Mounted |
| Applications: | Exterior |


Specification text

Wall Light luminaire from the KOALA family. Direct Indirect, Medium lighting distribution, UGR N/A. Light output of 11440lm with an efficacy of 143 lm/W. Light source colour temperature 5000K and CRI 80. Complete with DALI control gear. Nominal dimensions L200mm x W150mm x H365mm. Finished in Black.



Lighting performance

| | |
|--------------------------------|-----------------|
| Output lumens: | 11440 lm |
| Efficacy: | 143 lm/W |
| Rated power: | 80 W |
| Control gear: | DALI |
| Dimming range: | 1-100% |
| DC Suitable: | No |
| Colour temperature: | 5000K |
| MacAdams | <3 |
| CRI: | 80 |
| Radiation pattern: | Direct Indirect |
| Beam angle: | Medium |
| Unified glare rating (U.G.R.): | N/A |

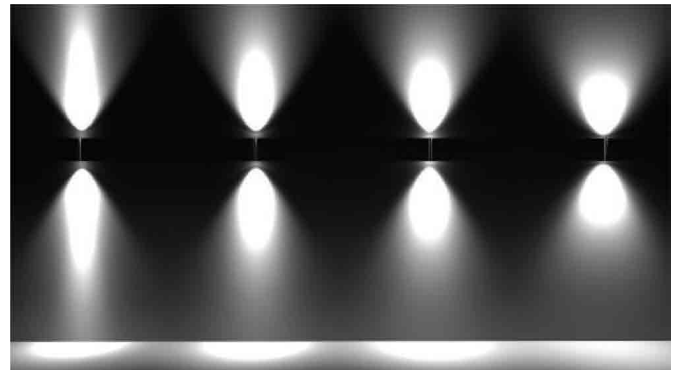

Physical details

| | |
|-------------------------|---------|
| Finish: | Black |
| Width: | 150mmmm |
| Depth: | 200mmmm |
| Height: | 365mmmm |
| Protection Rating (IP): | IP65 |
| Impact Rating (IK): | IK08 |

