RAY

+44 (0) 1279 450882
WWW.RIDI.CO.UK
SALES@RIDI.CO.UK

Luminaire type

Product reference:	RAY-50-0A-34K-F0-A-PS-ED
Article Number:	97-RAY0009ED
Product type:	Wall Mounted
Mounting type:	Wall
Applications:	Lighting Walkways, Tunnels, Storage Areas, Car Parks

Specification text

Wall Mounted luminaire from the RAY family. Symmetrical, Wide lighting distribution, UGR <25. Light output of 2453lm with an efficacy of 139lm/W. Light source colour temperature 3000/4000K and CRI 80. Complete with Fixed Output control gear and dali test 3hr emergency. Nominal dimensions L319 x W165 x H265mm. Finished in RAL7016.

Lighting performance

Output lumens:	2453 lm
Efficacy:	139 lm/W
Rated power:	17.7 W
Control gear:	Fixed Output
Dimming range:	1
DC Suitable:	0
Colour temperature:	3000/4000K
MacAdams	< 3
CRI:	80
Radiation pattern:	Symmetrical
Beam angle:	Wide
Unified glare rating (U.G.R):	<25

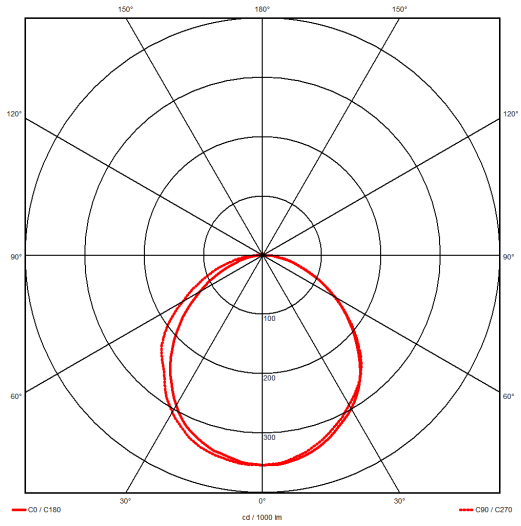

Physical details

Finish:	RAL7016
Width:	319 mm
Depth:	165 mm
Height:	265 mm
IP Rating:	IP65

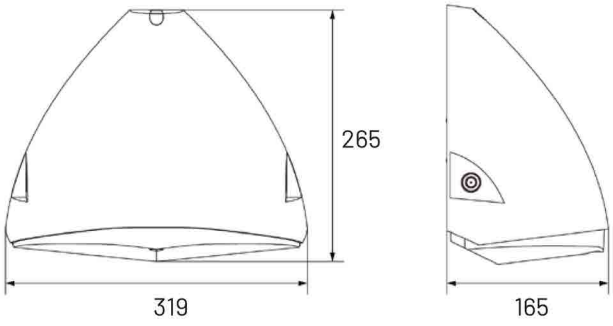

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes.
© 15/09/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.