RIDI UK
Additions

Product description

Design: The QSIGN-ECO is a versatile exit luminaire that offers a 28m viewing distance and 3 hour emergency duration in multiple fitment options. As standard suitable for surface, wall and flag mount, and with an additional accessory the luminaire can be ceiling recess mounted. The QSIGN-ECO comes in a white RAL 9016 finish, to match any building décor. Other colours can be available on request. The luminaire is provided with a full legend kit included with Up/Left/Right/Blank, the legends are mechanically fixed not self adhesive for a professional appearance.

- Maintained or Non-Maintained operation
- Single sided or double sided option
- LiFePO4 technology
- 3 Different mounting options included (Surface/Wall/Flag Mount)
- Available in black finish similar to RAL9005
- Central battery versions on request

Product image

Technical Data- QSIGN-ECO

Mounting type	Surface/Wall/Flag Mount, Recessed (with accessory)
Protection class	II
Ingress Protection	IP20
Nominal voltage	220 - 240 V
Type of control	On/Off
Rated power	3.0 W Max
Permissible ambient temperature	0°C to +40°C
Emergency Duration	3 hours
Re-charge period	16 hours
Weight	810 - 955 g

Drawing / Dimensions

Dimens. [mm]

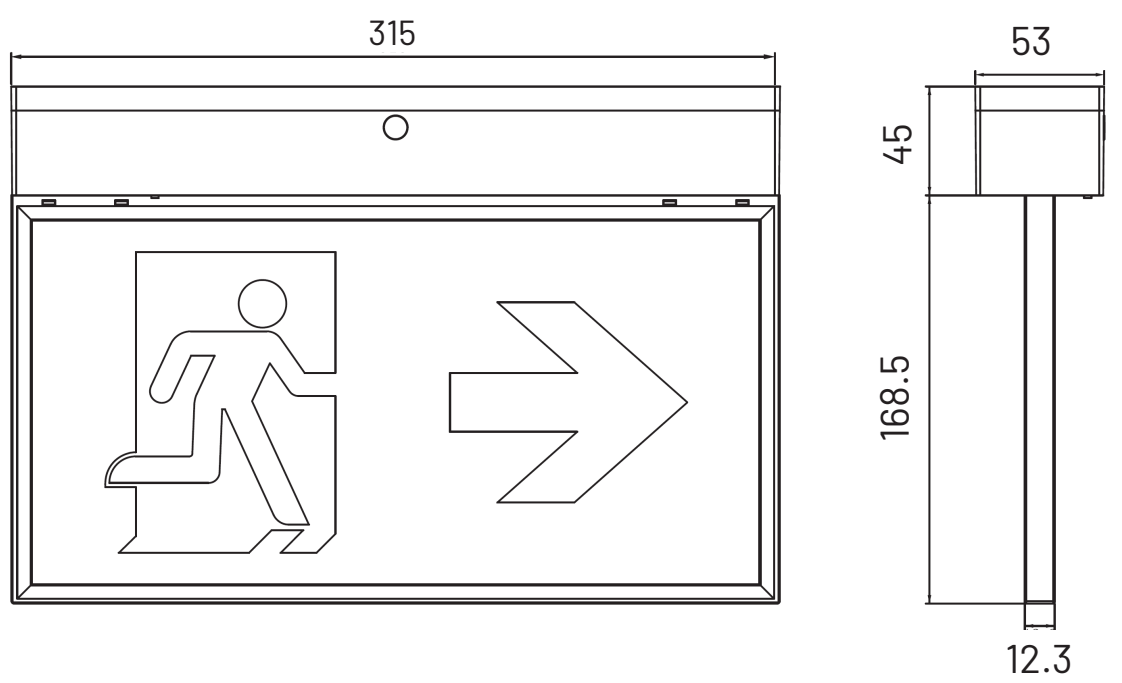

Cutout for recessed fixing accessory

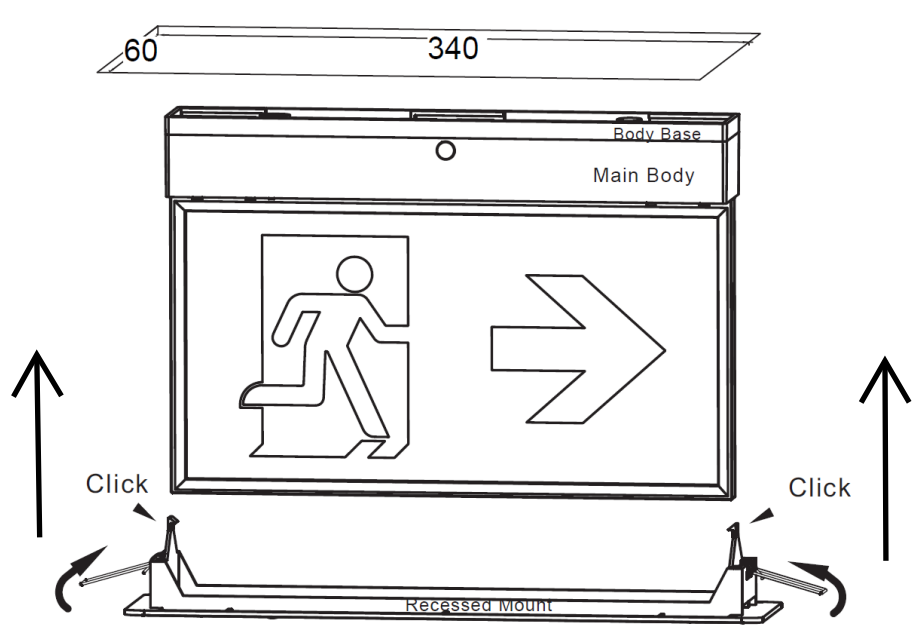



Wall mount/Flag mount kit included



97-QE/REC-KIT (not included)

Order codes

97-QE/C/6519	Q-Sign Eco Exit Sign Surface/Wall Manual Test
97-QE/C/6643	Q-Sign Eco Exit Sign Surface/Wall Self Test
97-QE/C/6644	Q-Sign Eco Exit Sign Surface/Wall Dali Test
97-QE/REC-KIT	Q-Sign Eco Exit Sign Recess Kit
/B	For Black finish add "/B" to the order code

Relevant Standards

EN 60598-2-22
EN 62034
EN 62386
ISO 7010